


NABCO Entrances Inc. S82 W18717 Gemini Drive Muskego, WI 53150 www.nabcoentrances.com 1-877-622-2694

JOB NAME:	
LOCATION:	
DISTRIBUTOR:	
DOOR #:	DATE:

GT-2300-LA **MANUAL SWING**

UNEQUAL PANELS ICU/CCU

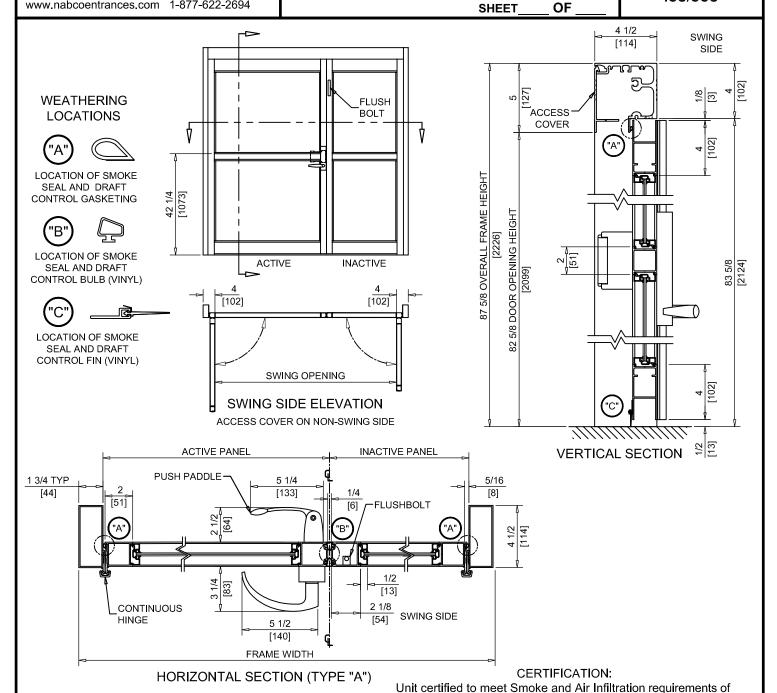

NFPA-105 at ambient temperatures for sprinklered buildings. NOTES:

- ENTRY TRIM ON SWING SIDE OF ACTIVE PANEL. 1
- PUSH PADDLE ON NON SWING SIDE OF ACTIVE PANEL. 2.
- FLUSH BOLT ON SWING SIDE OF INACTIVE PANEL.
- SILICONE SMOKE AND DRAFT CONTROL GASKETING RUNS HORIZONTALLY HEADER AND VERTICALLY BETWEEN DOORS AND JAMBS..
- WEATHERING VINYL AT LEAD ENDS OF DOORS. OPTIONAL BRUSH.
- WEATHERING VINYL AT BOTTOM OF DOORS. OPTIONAL BRUSH.
- FINISH IS ANODIZED CLEAR OR DARK BRONZE. OTHER FINISHES ARE OPTIONAL
- ROUGH OPENING EQUALS FRAME WIDTH +1/2" AND FRAME HEIGHT +1/4".
- BOTH PANELS SWING TO 90° AFTER LATCH OR FLUSH BOLT ARE RELEASED. BOTH PANELS CAPABLE OF 180° OPENING ADDING APPROXIMATLY 3 1/2" TO SWING OPENING.
- PLEASE REFER TO LOCAL, STATE AND NATIONAL BUILDING CODES FOR MINIMUM EGRESS WIDTH AND MINIMUM CLEAR OPENING HEIGHT.
- CUSTOM SIZES AND OPTIONAL ALUMINUM PROFILES ARE AVAILABLE

FRAME WIDTH	INACTIVE * DOOR	ACTIVE DOOR	SWING OPENING	
5'-3 1/2" [1613]	24" [610]	36" [914]	55 1/2" [1410]	
5'-9 1/2" [1765]	24" [610]	42" [1067]	61 1/2" [1562]	
6'-3 1/2" [1918]	24" [610]	48" [1219]	67 1/2" [1715]	
* Optional widths up to 48" for inactive panel available.				