

# Gyro Tech Complete Swing Door System - **ORDER FORM**

Rev 5-13

Company: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 PO #: \_\_\_\_\_  
 Ship to: \_\_\_\_\_  
 \_\_\_\_\_

Distributor #: \_\_\_\_\_ Door #: \_\_\_\_\_  
 Job Name: \_\_\_\_\_  
 Contact: \_\_\_\_\_  
 Qty Required: \_\_\_\_\_  
 Freight Carrier: \_\_\_\_\_

Notes:

**1. Type of Header:**

Bottom Load	Side Load
_____ 400 C *	_____ 8400 C *
_____ 300 F	_____ 8300 F
_____ 400 F *	_____ 8400 F *

\_\_\_\_\_ \* Electrical Access Hole in End Cap?  
 \_\_\_\_\_ \* Electrical Access Hole in Top of Header?  
 \_\_\_\_\_ \* Access Hole for Cam Adjustment in Top of Header?  
 \_\_\_\_\_ No Holes Required

"F" = with center pivot and fingerguard  
 "C" = with Continuous Hinge

**2. Swing & Handing:**

\_\_\_\_\_ Inswing with panic breakout  
 \_\_\_\_\_ Inswing without panic breakout (check codes)  
 \_\_\_\_\_ Outswing  
 \_\_\_\_\_ (Place Back to Pivot Jamb)  
 \_\_\_\_\_ RT Hand IN \_\_\_\_\_ RT Hand OUT  
 \_\_\_\_\_ LT Hand IN \_\_\_\_\_ LT Hand OUT

**3. Glass Thickness:**

\_\_\_\_\_ Door Glass Thickness (1/4", 1", other)  
 \_\_\_\_\_ Transom Glass Thickness (1/4", 1", other)  
 \_\_\_\_\_ (glass not included)

**4. Frame Dimensions:**

\_\_\_\_\_ Header Height (to top)  
 \_\_\_\_\_ (90" standard for bottom load)  
 \_\_\_\_\_ (91" standard for side load)  
 \_\_\_\_\_ Height Including Transom (to top)  
 \_\_\_\_\_ Threshold (5-1/2" standard width)  
 \_\_\_\_\_ Frame Width

**5. Pivot type:**

\_\_\_\_\_ Ctr Pivot \_\_\_\_\_ with FG  
 \_\_\_\_\_ \_\_\_\_\_ no FG  
 \_\_\_\_\_ Continuous Hinge

**8. Application:**

\_\_\_\_\_ Single \_\_\_\_\_ Simultaneous Pair

**9. Finish:**

\_\_\_\_\_ Clear (204) \_\_\_\_\_ Dark bronze (313)

**10. Adds:**

\_\_\_\_\_ 10" Bottom rail  
 \_\_\_\_\_ Acuvision on swing side  
 \_\_\_\_\_ Additional aluminum cart bars (ea)  
 \_\_\_\_\_ Transom (up to 120")  
 \_\_\_\_\_ Vertical in transom

**11. Changes & Deducts:**

\_\_\_\_\_ Deduct Guide rails  
 \_\_\_\_\_ Acusensor in lieu of Optex Reaction Two  
 \_\_\_\_\_ Deduct one Aluminum Cart Bar  
 \_\_\_\_\_ Deduct Finger Guards  
 \_\_\_\_\_ Deduct Jamb Tubes  
 \_\_\_\_\_ Deduct Muntin  
 \_\_\_\_\_ Deduct MS Lock (standard)  
 \_\_\_\_\_ Deduct Push Bar and Handle  
 \_\_\_\_\_ Key switch in lieu of rocker switch

**12. Profile:**

\_\_\_\_\_ Narrow Stile (standard profile)  
 \_\_\_\_\_ Medium Stile

**13. Swing Door Size:**

\_\_\_\_\_ Width \_\_\_\_\_ Narrow Stile (2-1/8")  
 \_\_\_\_\_ Height \_\_\_\_\_ Medium Stile (4")  
 \_\_\_\_\_ Muntin Bar Height (standard 42-1/4" to top)  
 \_\_\_\_\_ Muntin Size \_\_\_\_\_ 2" Standard  
 \_\_\_\_\_ \_\_\_\_\_ Other Size (Special)

**14. Door Panel Accessories:**

\_\_\_\_\_ Push Bar Both Sides  
 \_\_\_\_\_ (in lieu of standard Push Bar & Pull Handle)  
 \_\_\_\_\_ Prep in Field (hardware shipped loose)

**6. Jamb Tubes**

- \_\_\_\_\_ 1-3/4" x 4-1/2" (*standard*)
- \_\_\_\_\_ 4.5" x 4.5" jambs (204 or 313 finish)
- \_\_\_\_\_ Existing (*specify width and height*)

**15. Door Pivot Location:**

- \_\_\_\_\_ Outer Jambs
- \_\_\_\_\_ Center Post (*send sketch*)

# Gyro Tech Complete Swing Door System - Order Form

Rev 5-13

Company: \_\_\_\_\_

Date: \_\_\_\_\_

PO #: \_\_\_\_\_

Ship to: \_\_\_\_\_

Distributor #: \_\_\_\_\_

Door #: \_\_\_\_\_

Job Name: \_\_\_\_\_


Contact: \_\_\_\_\_

Qty Required: \_\_\_\_\_

Freight Carrier: \_\_\_\_\_

Notes:

## Frame Dimensions (in Inches)

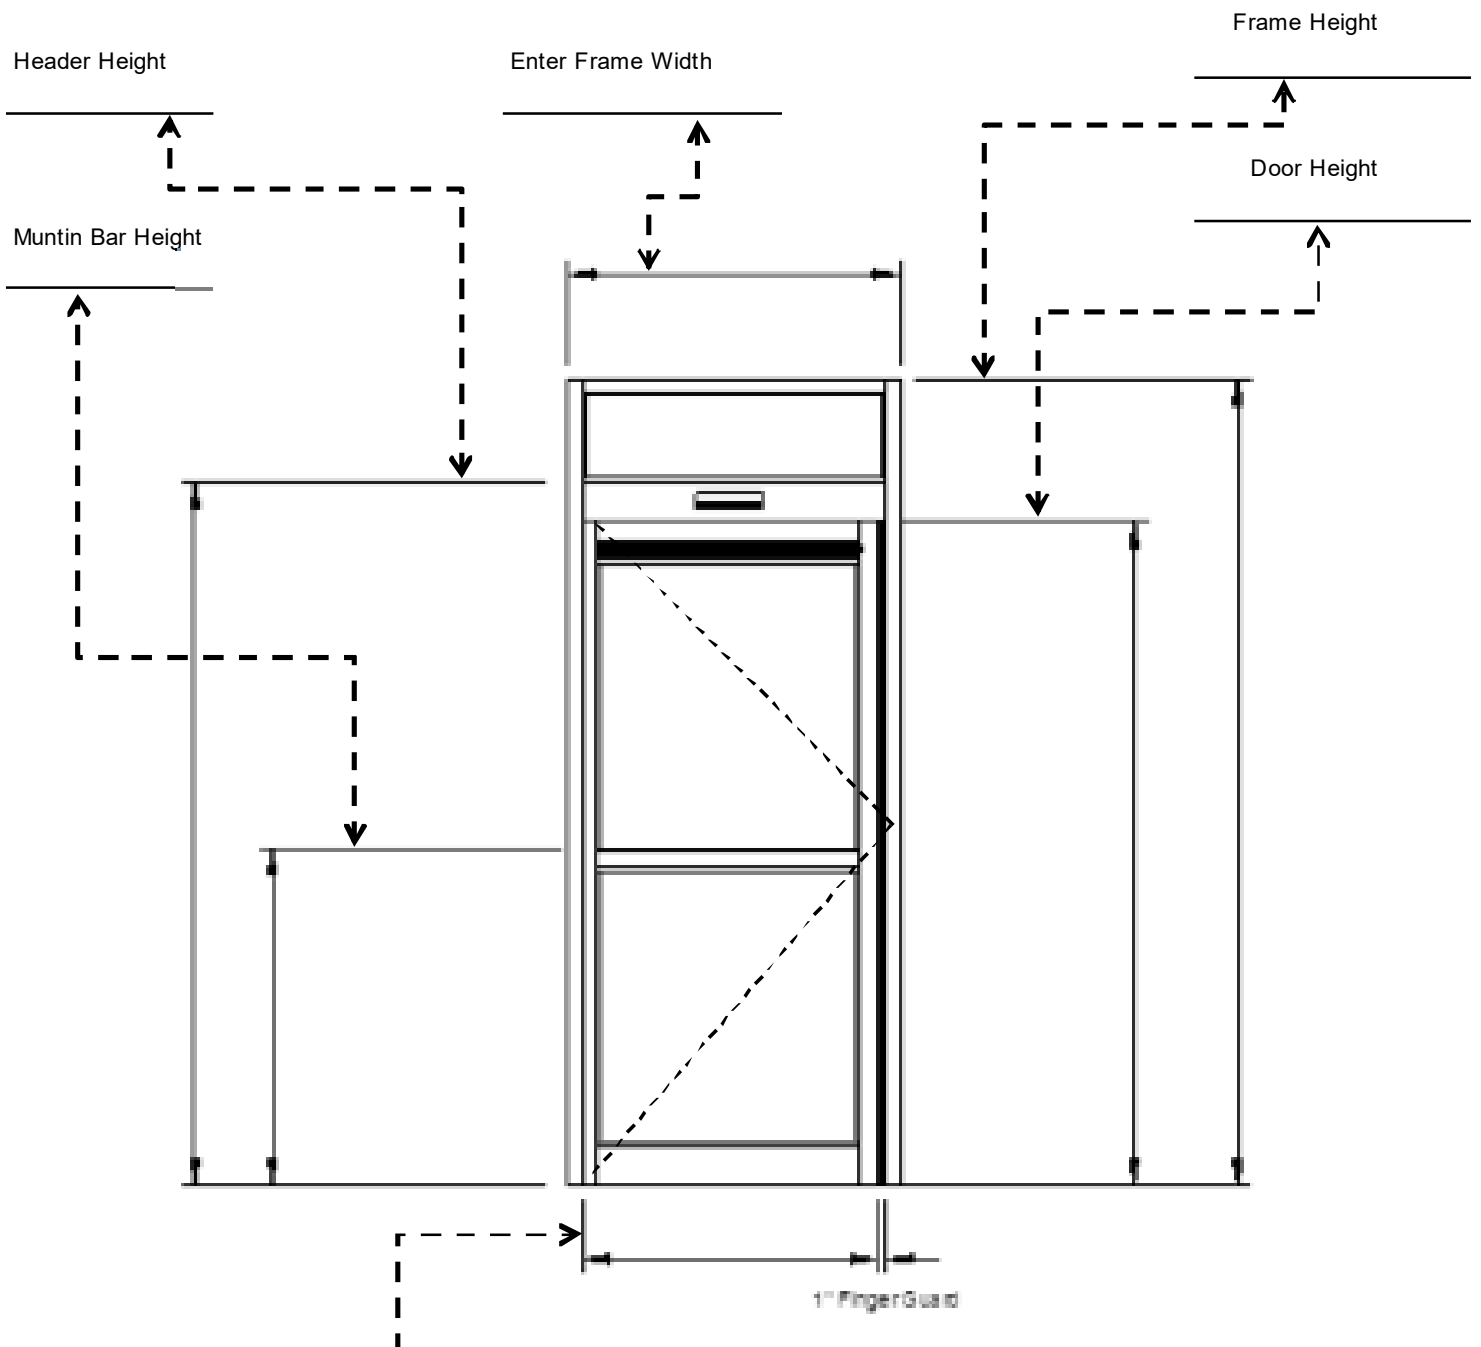

Door Width

