

Gyro Tech Complete Swing Door System - **QUOTE REQUEST**

Rev 5-13

Company: _____
Date: _____
PO #: _____
Ship to: _____

Distributor #: _____ Door #: _____
Job Name: _____
Contact: _____
Qty Required: _____
Freight Carrier: _____

Notes:

1. Type of Header:

Bottom Load

Side Load

_____ 400 C * _____ 8400 C *
_____ 300 F _____ 8300 F
_____ 400 F * _____ 8400 F *

_____ * Electrical Access Hole in End Cap?
_____ * Electrical Access Hole in Top of Header?
_____ * Access Hole for Cam Adjustment in Top
of Header?
_____ No Holes Required

"F" = with center pivot and fingerguard

"C" = with Continuous Hinge

2. Swing & Handing:

_____ Inswing with panic breakout
_____ Inswing without panic breakout (check codes)
_____ Outswing
_____ (*Place Back to Pivot Jamb*)
_____ RT Hand IN _____ RT Hand OUT
_____ LT Hand IN _____ LT Hand OUT

3. Glass Thickness:

_____ Door Glass Thickness (1/4", 1", other)
_____ Transom Glass Thickness (1/4", 1", other)
_____ (*glass not included*)

4. Frame Dimensions:

_____ Header Height (to top)
_____ (*90" standard for bottom load*)
_____ (*91" standard for side load*)
_____ Height Including Transom (to top)
_____ Threshold (*5-1/2" standard width*)
_____ Frame Width

5. Pivot type:

_____ Ctr Pivot _____ with FG
_____ _____ no FG
_____ Continuous Hinge

8. Application:

_____ Single _____ Simultaneous Pair

9. Finish:

_____ Clear (204) _____ Dark bronze (313)

10. Adds:

_____ 10" Bottom rail
_____ Acuvision on swing side
_____ Additional aluminum cart bars (*ea*)
_____ Transom (*up to 120"*)
_____ Vertical in transom

11. Changes & Deducts:

_____ Deduct Guide rails
_____ Acusensor in lieu of Optex Reaction Two
_____ Deduct one Aluminum Cart Bar
_____ Deduct Finger Guards
_____ Deduct Jamb Tubes
_____ Deduct Muntin
_____ Deduct MS Lock (*standard*)
_____ Deduct Push Bar and Handle
_____ Key switch in lieu of rocker switch

12. Profile:

_____ Narrow Stile (*standard profile*)
_____ Medium Stile

13. Swing Door Size:

_____ Width _____ Narrow Stile (2-1/8")
_____ Height _____ Medium Stile (4")
_____ Muntin Bar Height (*standard 42-1/4" to top*)
_____ Muntin Size _____ 2" Standard
_____ _____ Other Size (*Special*)

14. Door Panel Accessories:

_____ Push Bar Both Sides
_____ (in lieu of standard Push Bar & Pull Handle)
_____ Prep in Field (hardware shipped loose)

6. Jamb Tubes

- ☐ 1-3/4" x 4-1/2" (*standard*)
- ☐ 4.5" x 4.5" jambs (204 or 313 finish)
- ☐ Existing (*specify width and height*)

15. Door Pivot Location:

- ☐ Outer Jambs
- ☐ Center Post (*send sketch*)

Gyro Tech Complete Swing Door System - Order Form


Rev 5-13

Company: _____
Date: _____
PO #: _____
Ship to: _____

Distributor #: _____ Door #: _____
Job Name: _____
Contact: _____
Qty Required: _____
Freight Carrier: _____

Notes:

Frame Dimensions (in Inches)

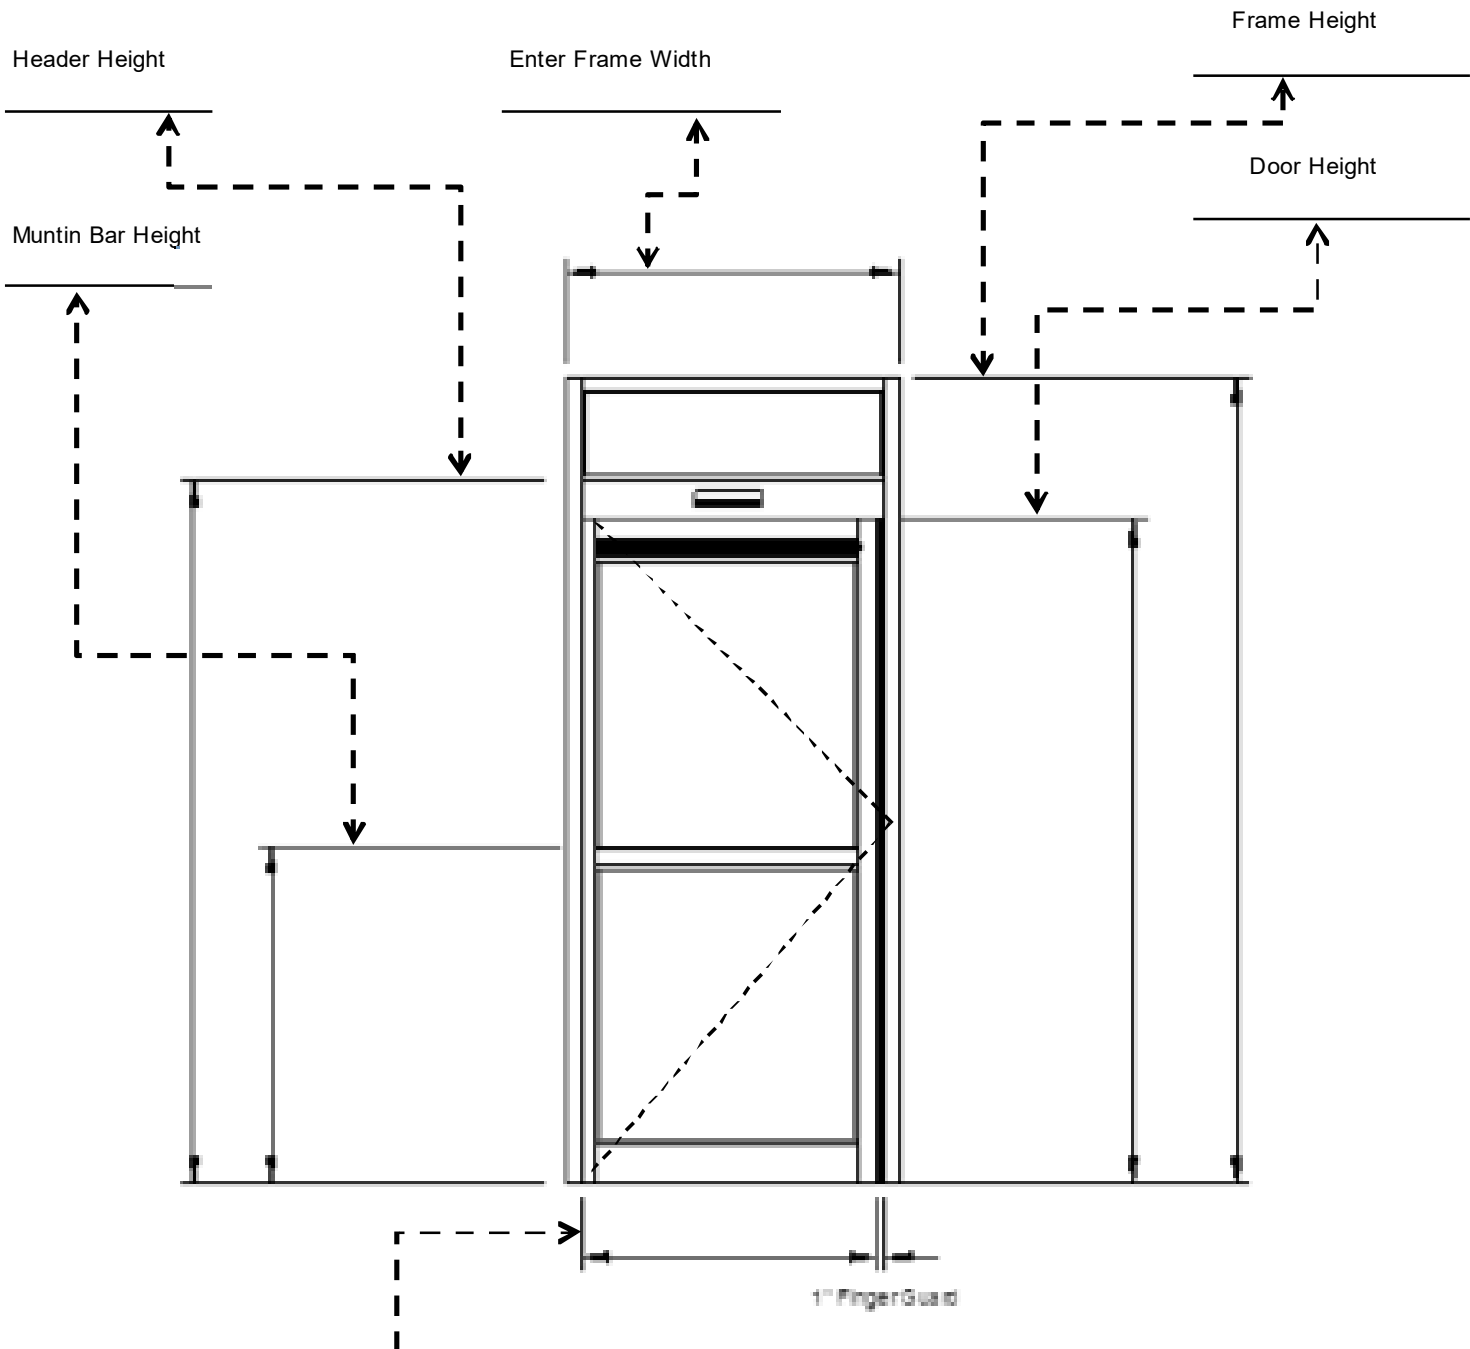

Door Width

