



Technical Service Bulletin

Date 09/12/2023	Bulletin # 118	Model NAX GT-9000 SERIES HERMETIC SLIDE DOOR (DS150, U30 ONLY)
Subject SERVICE PARTS NOW AVAILABLE THROUGH NABCO (Muskego, WI)		

Effective 9/12/2023:



These parts are currently being stocked for the NAX Series of Sliding Doors with the U30 microprocessor (DS150 motor) and are available for distribution to Nabco Branches and Distributors:

Part Number	Description	Recommended Replacement And Preventive Maintenance
*V-00978	PACKING, BOTTOM, NAX	INSPECT EVERY 6 MONTHS- REPLACE EVERY 5 YEARS
*V-00979	PACKING, THREE-SIDED JAMB, NAX	INSPECT EVERY 6 MONTHS- REPLACE EVERY 5 YEARS
*V-00980	PACKING, VERTICAL, NAX	INSPECT EVERY 6 MONTHS- REPLACE EVERY 5 YEARS
V-00982	CLIP, WIRE SUPPORT, NAX	--
*V-00983-10	DOOR STOP, NAX, Left Side	INSPECT EVERY 6 MONTHS- REPLACE EVERY 5 YEARS
*V-00983-20	DOOR STOP, NAX, Right Side	INSPECT EVERY 6 MONTHS- REPLACE EVERY 5 YEARS
V-00984-10	RECEIVER, SPRING MECHANISM, NAX, RH	--
V-00984-20	RECEIVER, SPRING MECHANISM, NAX, LH	--
**V-00985-10	SPRING MECHANISM, LIGHT DUTY, NAX, RH	REPLACE EVERY 7 YEARS OR 200K CYCLES
**V-00985-20	SPRING MECHANISM, LIGHT DUTY, NAX, LH	REPLACE EVERY 7 YEARS OR 200K CYCLES
V-00987	SPACER, SPRING MECHANISM, NAX	--
**V-00988-10	HANGER, DOOR, NAX, LEAD	REPLACE EVERY 7 YEARS OR 200K CYCLES
**V-00988-20	HANGER, DOOR, NAX, TRAIL	REPLACE EVERY 7 YEARS OR 200K CYCLES
V-00989	SPACERHANGER, DOOR, NAX	--
V-60990	END CAP Set, HEADER, NAX, 204	--
V-00991	BRKT Set, COVER, NAX	--
V-00992	BELT CLIP, SINGLE, NAX	--
**V-00994-120	BELT, TIMING, S8M X 15mm WIDE,3056mm	REPLACE EVERY 7 YEARS OR 200K CYCLES
**V-00994-239	BELT, TIMING, S8M X 15mm WIDE,6072mm	REPLACE EVERY 7 YEARS OR 200K CYCLES
V-00995	BRKT SET, GEAR MOTOR, NAX	--
**V-00996-10	ROLLER, GUIDE, FLOOR, LEAD, NAX, RH	REPLACE EVERY 7 YEARS OR 200K CYCLES
**V-00996-20	ROLLER, GUIDE, FLOOR, LEAD, NAX, LH	REPLACE EVERY 7 YEARS OR 200K CYCLES
**V-00997-10	ROLLER, GUIDE, FLOOR, TRAIL, NAX, RH	REPLACE EVERY 7 YEARS OR 200K CYCLES
**V-00997-20	ROLLER, GUIDE, FLOOR, TRAIL, NAX, LH	REPLACE EVERY 7 YEARS OR 200K CYCLES

* Nabco Entrances recommends the packaging **highlighted in yellow** be replaced every 5 years or when showing any signs of wear. This will maintain the sound insulation and airtight performance compliance specifications of the NAX Series Sliding Doors.

All rollers, hangers, belt material and springs **highlighted in blue are designed to be replaced after 7 years or when showing signs of wear.

REPLACE EVERY 7 YEARS OR 200K CYCLES

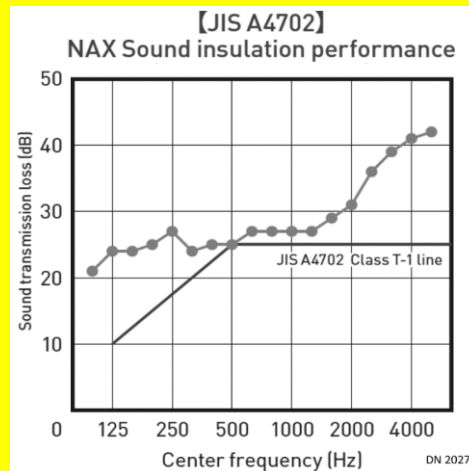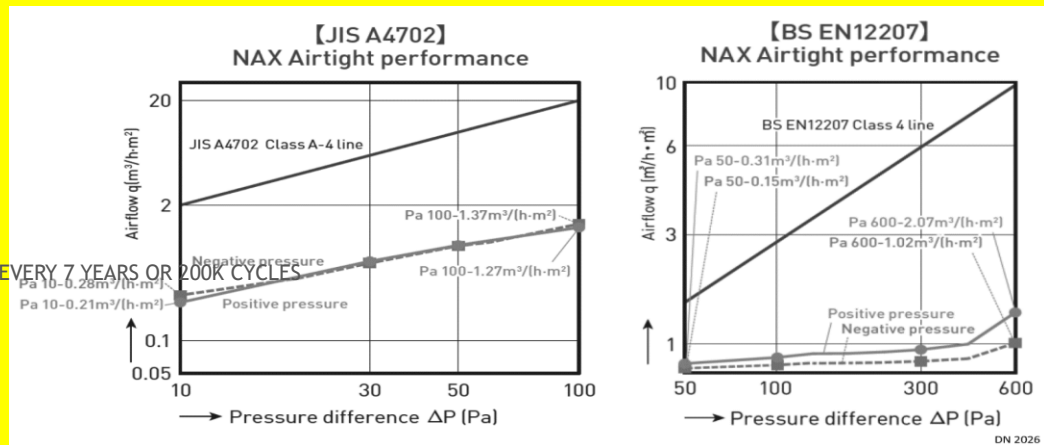

Please contact Customer Service for pricing and availability, or email Customerservice@nabcoentrances.com to order parts.