

GT1175

Telescopic Automatic Sliding Doors

Where ELEGANCE meets DURABILITY



Product Features and Benefits

- Heavy-duty anodized roller track for **long-lasting durability**
- Large urethane door rollers for **smooth and long-lasting operation**
- Space-saving versatility with the **elegant look of a large door opening**
- Belt drive and brushless motor system ensures **silent and reliable operation**
- An unprecedented 25% larger door opening to **withstand demanding traffic conditions**
- Superior double-mohair thermal brush provides **maximum isolation from outside elements**
- Equipped with sensor systems that comply with ANSI 156.10 and promote **reduced liability and increased safety**



GT1175 Telescopic Automatic Sliding Doors

The NABCO GT1175 Telescopic Sliding Door puts your mind at ease when looking for an automatic door solution and limited space is a concern. This system combines the elegant look of a large, clear door opening with space-saving versatility. The durable, heavy-duty GT1175 Telescopic Sliding Door is engineered to withstand challenging environment and weather conditions while maintaining a smooth operation and quiet, whisper-like performance. NABCO's microprocessor control provides reliable door operation, important usage counts, and diagnostic features for quick troubleshooting and reduced maintenance costs, making this the ideal automatic door entrance solution for unique applications.

The GT1175 Slider Operator




Header cover is pre-wired for sensor installation and uses extra-thick aluminum extrusions to minimize deflection.



Quick-disconnect power supply Low-voltage transformer Microprocessor control Brushless motor/gearbox Thick weatherstrip Microfiber-reinforced belt

PRODUCT INFORMATION	
Header dimensions	8 3/4"W (222.25) x 7 1/2"H (190.5)
Standard finish	Clear and dark bronze anodized
Optional finishes	Painted, clad, special anodized
Mounting	Concealed
Threshold	Surface-applied, recessed, none
Configurations	Single, bi-part / full breakout, fixed sidelite
Transom	Optional
TECHNICAL INFORMATION	
Operator drive	Electro-mechanical
Drive system	Belt drive
Motor type	1/4 HP (peak) brushless
Primary circuit protection	Breaker
Controller	Microprocessor
Breakout	System disabled when panels break out
Operating voltage	120 VAC - 5 AMP
Auxiliary power output	12 VDC
Maximum door panel weight	600 lbs.
Switch modes	On/off, 1-way, 2-way, hold-open, night
Opening and closing speed	Adjustable
Reduced opening function	Standard
Obstacle detection	Available in both directions
Hold-open time	Adjustable (0-67 seconds)
CODE COMPLIANCE / APPROVALS	
Code compliance	ANSI A156.10
Approvals	UL, ULC and CSFM

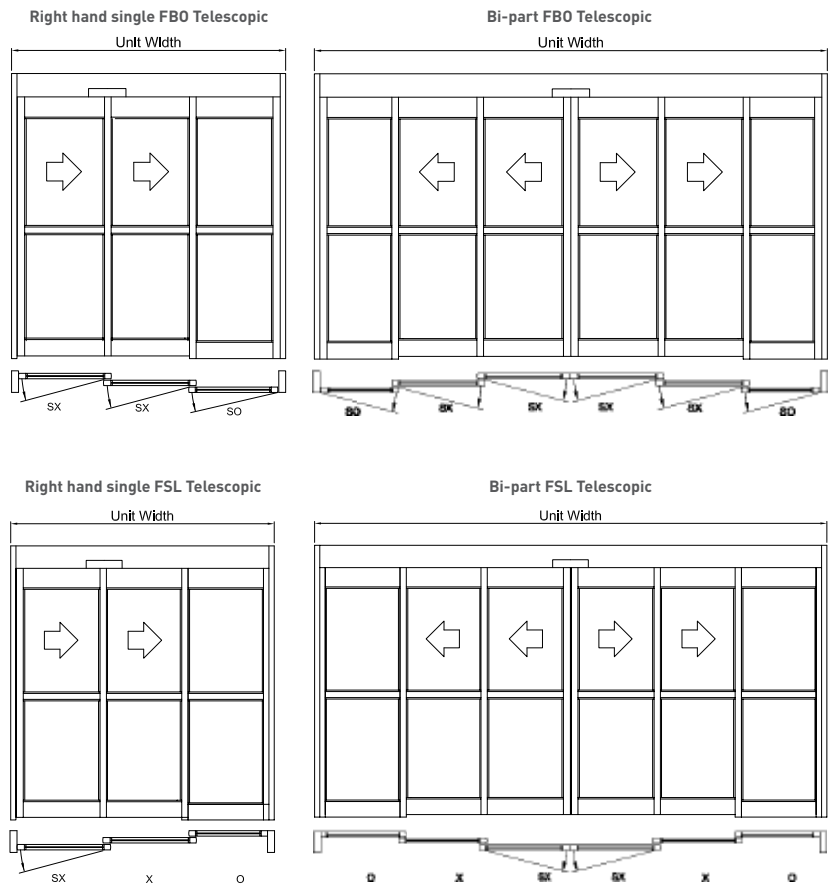

NABCO Service and Specifications

Along with the NABCO factory branches, NABCO has the largest independently owned network of automatic door distributors in North America. Their friendly, qualified installers and technicians always strive to exceed your expectations from install to after-sales service. NABCO's factory branches and independent distributors provide AAADM-certified technicians to ensure your doors meet all ANSI A156.10 standards.

Complete three-part specifications and CAD drawings are available on the NABCO website.

SELECTION GUIDE			
DOOR TYPE	FRAME WIDTH	DOOR OPENING	BREAKOUT OPENING
3-panel FSL	5' 1 1/2" (1562) - 12' (3657)	32 1/8" (816) - 87 1/8" (2213)	35 1/2" (902) - 90 1/2" (2299)
3-panel FBO			51 1/2" (1308) - 134" (3404)
6-panel FSL	7' 11 1/2" (2425) - 16' (4876)	48 5/8" (1235) - 113" (2870)	60 5/8" (1540) - 125" (3175)
6-panel FBO			79 1/2" (2019) - 176" (4470)



Member of the Nabtesco Group

NABCO ENTRANCES INC.

582 W18717 Gemini Drive | Muskego, WI 53150 | 877-622-2694 | Fax 888-679-3319

www.nabcoentrances.com | Email info@nabcoentrances.com



Distributed by: