





NABCO Entrances Inc.
 S82 W18717 Gemini Drive Muskego, WI 53150
 www.nabcoentrances.com 1-877-622-2694

JOB NAME: _____
 LOCATION: _____
 DISTRIBUTOR: _____
 DOOR #: _____ DATE: _____
 SHEET _____ OF _____


GT20-02L OHC LE
SIDELOAD HEADER
CENTER PIVOT
LEFT HAND
OUTSWING

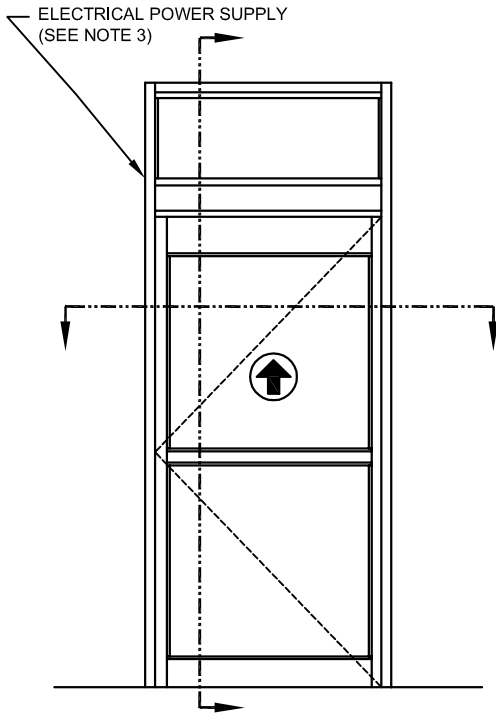


INTERIOR ELEVATION/PLAN




THRESHOLD AT FLOOR PIVOT ASSEMBLY FOR USE WITH MAT & SENSOR CONTROL COMBINATION



THRESHOLD AT FLOOR PIVOT ASSEMBLY FOR USE WITH MAT CONTROLS

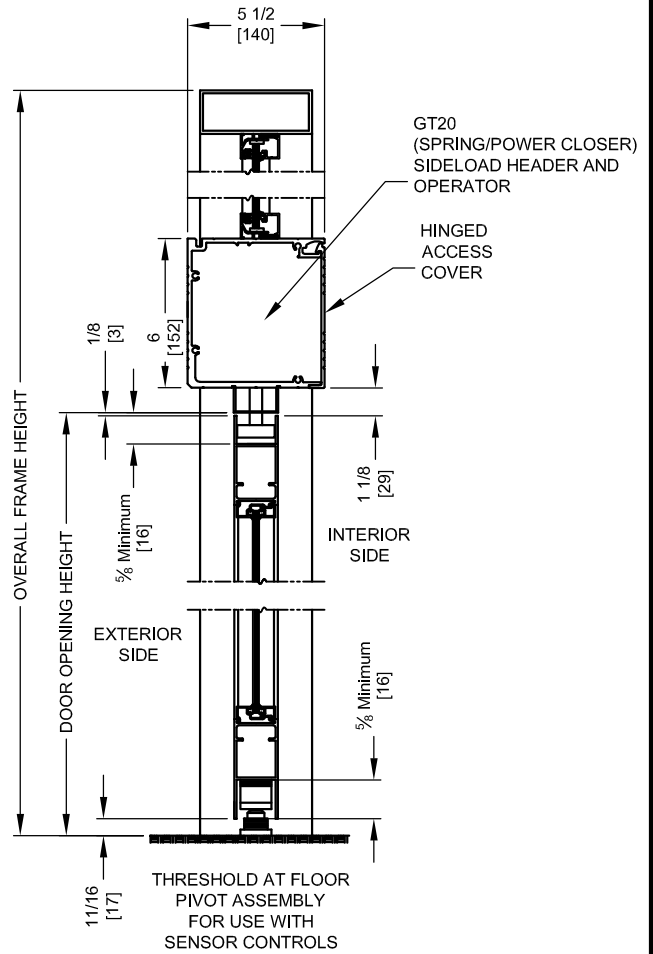

VERTICAL SECTION

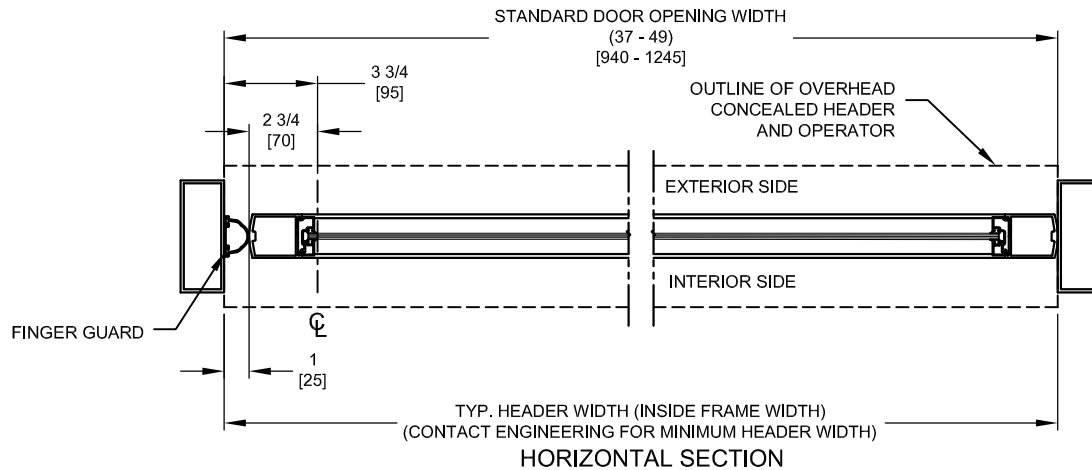

HORIZONTAL SECTION

- NOTES:
1. GUIDE RAILS, MATS, PUSH PLATES AND VARIOUS ELECTRONIC DEVICES FOR THE DOOR ACTIVATION AND CONTROL ARE OPTIONAL. CONSULT WITH YOUR NABCO/GYRO TECH DISTRIBUTOR.
 2. DOORS AND FRAMES ARE NOT INCLUDED UNLESS NOTED.
 3. POWER TO HEADER WILL BE 115VAC, 5 AMP PER OPERATOR PROVIDED BY ELECTRICAL CONTRACTOR.
 4. STANDARD HARDWARE SUPPLIED WILL ACCOMODATE DOOR THICKNESS OF 1 3/4" TO 2 1/4".