





NABCO Entrances Inc.
S82 W18717 Gemini Drive Muskego, WI 53150
www.nabcoentrances.com 1-877-622-2694

JOB NAME: _____
LOCATION: _____
DISTRIBUTOR: _____
DOOR #: _____ DATE: _____
SHEET _____ OF _____


GT400-01R
BOTTOM LOAD
HEADER
RIGHT HAND
INSWING

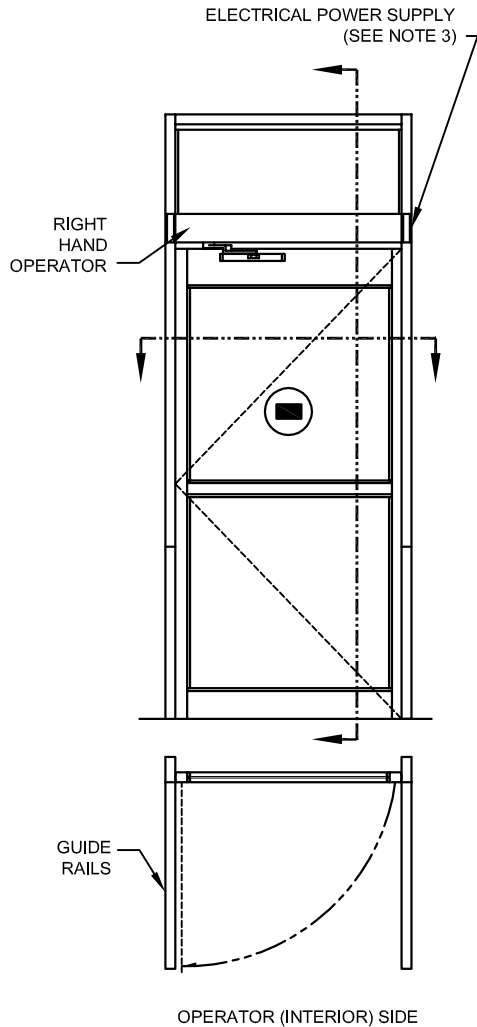


OPERATOR (INTERIOR) SIDE
INTERIOR ELEVATION/PLAN

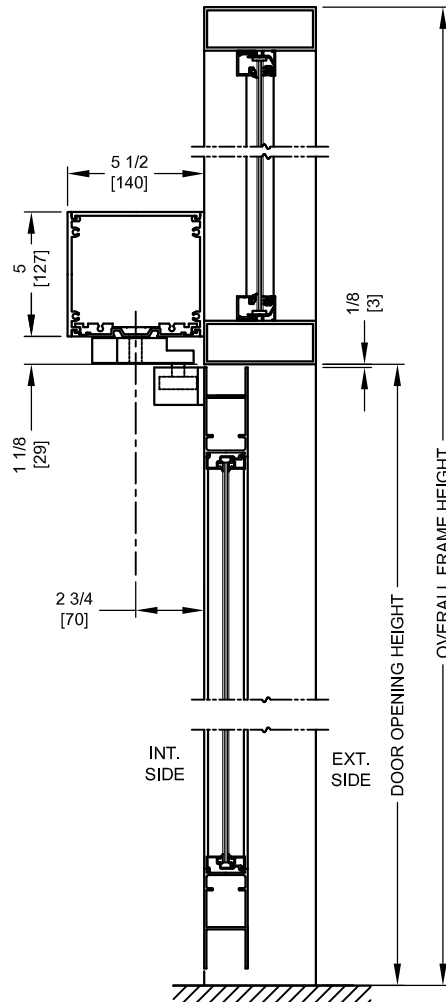


VERTICAL SECTION
BUTT/OFFSET PIVOT OPTION

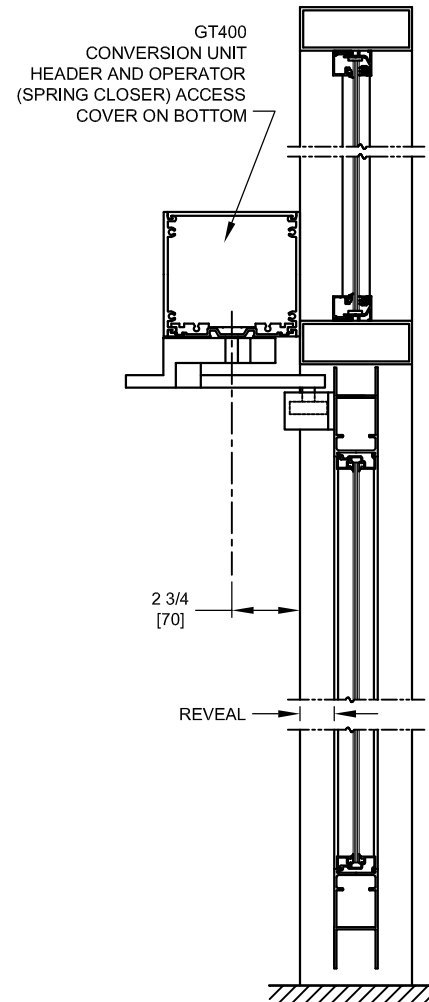

VERTICAL SECTION
CENTER PIVOT OPTION

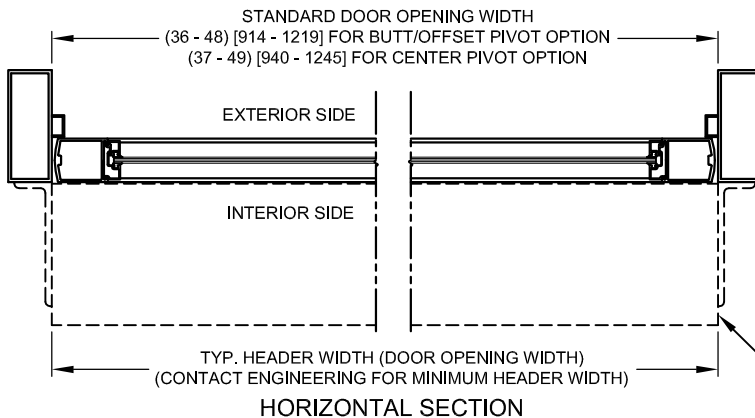

HORIZONTAL SECTION

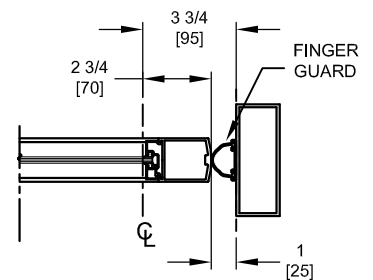

HINGE JAMB AT CENTER
PIVOT OPTION

NOTES:

1. GUIDE RAILS, MATS, PUSH PLATES AND VARIOUS ELECTRONIC DEVICES FOR THE DOOR ACTIVATION AND CONTROL ARE OPTIONAL. CONSULT WITH YOUR NABCO/GYRO TECH DISTRIBUTOR.
2. DOORS AND FRAMES ARE NOT INCLUDED UNLESS NOTED.
3. POWER TO HEADER WILL BE 115VAC, 5 AMP PER OPERATOR PROVIDED BY ELECTRICAL CONTRACTOR.
4. STANDARD HARDWARE SUPPLIED WILL ACCOMMODATE DOOR THICKNESS OF 1 3/4" TO 2 1/4".
5. APPLICATION ON BALANCE DOORS REQUIRES RELOCATION OF THE OPERATOR PIVOT.