

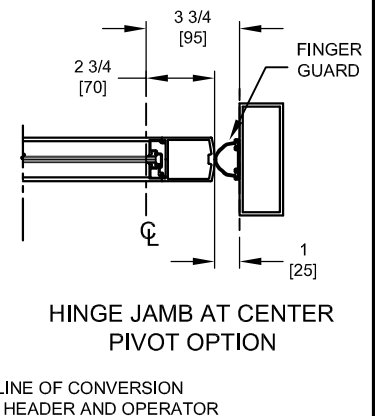
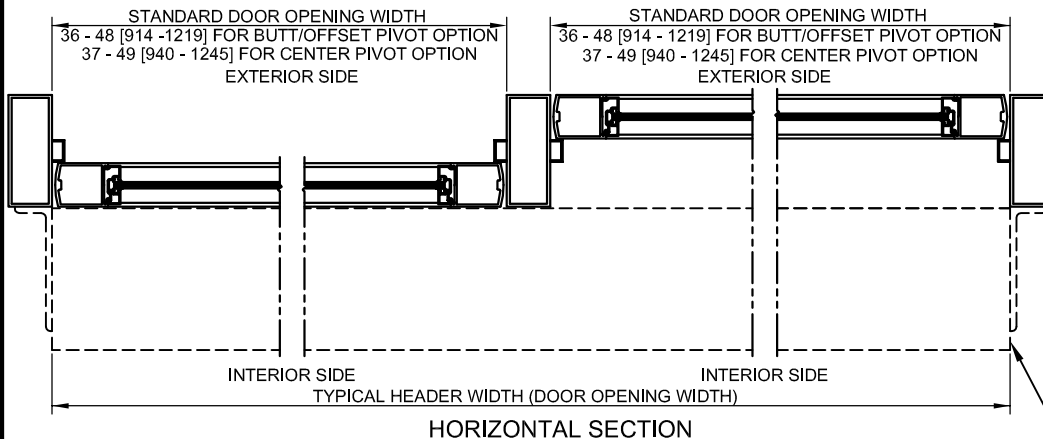
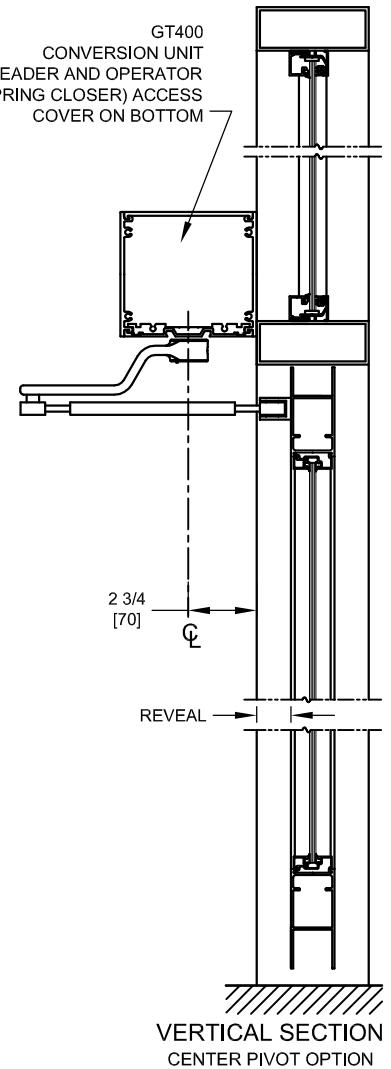


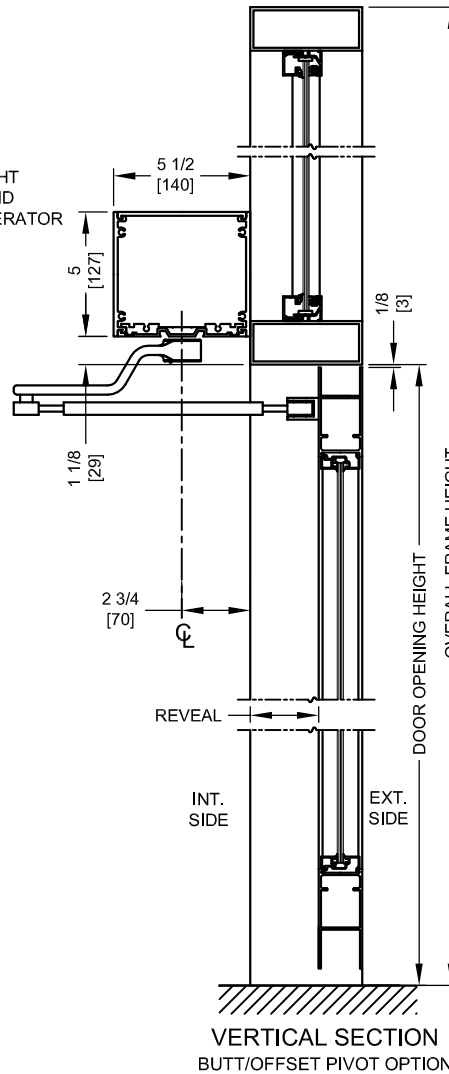

NABCO Entrances Inc.  
S82 W18717 Gemini Drive Muskego, WI 53150  
www.nabcoentrances.com 1-877-622-2694

JOB NAME: \_\_\_\_\_  
LOCATION: \_\_\_\_\_  
DISTRIBUTOR: \_\_\_\_\_  
DOOR #: \_\_\_\_\_ DATE: \_\_\_\_\_  
SHEET \_\_\_\_\_ OF \_\_\_\_\_

**GT400-05**  
**BOTTOM LOAD**  
**HEADER**  
**DUAL**  
**INSWING/OUTSWING**

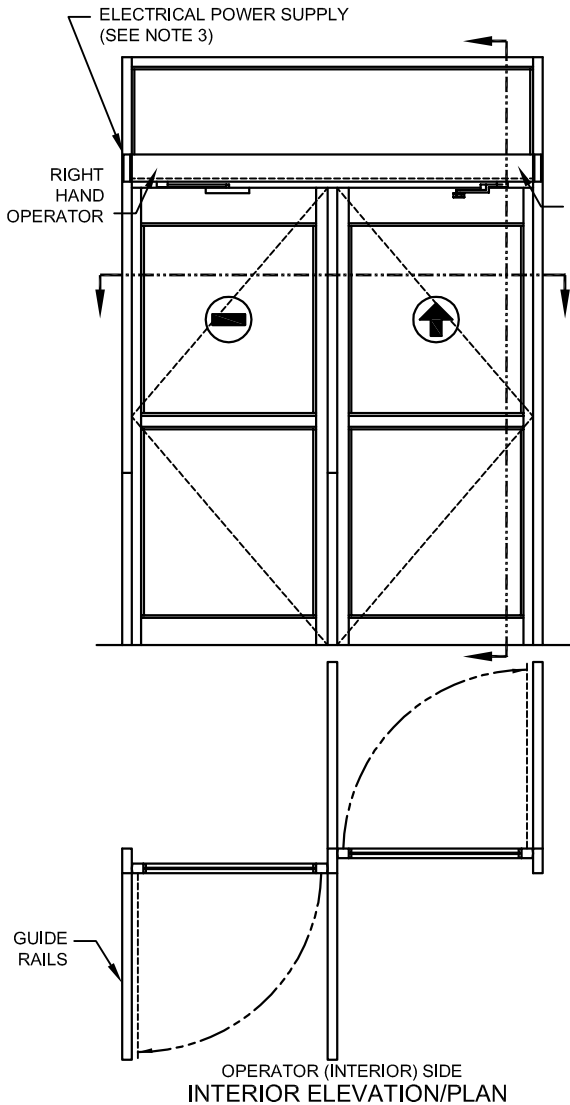

NOTES:

1. GUIDE RAILS, MATS, PUSH PLATES AND VARIOUS ELECTRONIC DEVICES FOR THE DOOR ACTIVATION AND CONTROL ARE OPTIONAL. CONSULT WITH YOUR NABCO/GYRO TECH DISTRIBUTOR.
2. DOORS AND FRAMES ARE NOT INCLUDED UNLESS NOTED.
3. POWER TO HEADER WILL BE 115VAC, 5 AMP PER OPERATOR PROVIDED BY ELECTRICAL CONTRACTOR.
4. STANDARD HARDWARE SUPPLIED WILL ACCOMODATE DOOR THICKNESS OF 1 3/4" TO 2 1/4".
5. APPLICATION ON BALANCE DOORS REQUIRES RELOCATION OF THE OPERATOR PIVOT.