

NABCO GT1175

Standard Automatic Sliding Door

NABCO



Great for the Following Applications:

- Airports & Transportation, Grocery & Retail, Healthcare, Hospitality, Malls, and many other applications

The Standard High-Performance Entrance System

- Integral flush-glazed framing enhances the entrance appearance
- Large urethane door rollers for smooth and long-lasting operation
- Motorized belt-drive for silent operation
- Opus Control is engineered to withstand challenging environmental and weather conditions.
- Adjustable thermal brush system on the bottom of the door adds extra life
- Extra duty anodized roller track for long lasting durability
- Electrified Glass Option Available

NABCO GT1175


Automatic Sliding Door

Standard Automatic Sliding Doors

The NABCO GT1175 is engineered to withstand challenging environmental and weather conditions. This ultra-quiet, high-performance operator is the right solution for every automatic sliding door entrance. Configurations include fixed sidelight or full breakout and are available as single or bi-part sliders; offering a variety of options and is equipped with sensor systems that comply with the ANSI A156.10 standard to promote reduced liability and increased safety.

GT1175 with Opus Control Header

Header cover is pre-wired for sensor installation and uses extra-thick aluminum extrusions to minimize deflection.

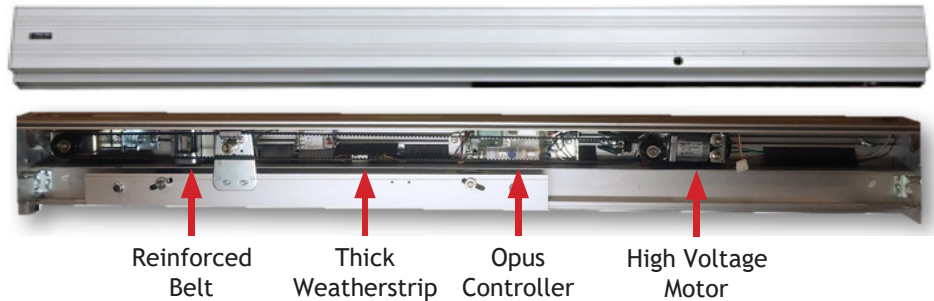

Product Information

Header dimensions - standard	6 1/2"W (165.1) x 7 1/2"H (190.5)
Standard finish	Clear and dark bronze anodized
Optional finishes	Painted, clad, special anodized
Mounting	Concealed and surface-applied
Threshold Options	Surface-applied, recessed, none
Configurations	Single, bi-part / full breakout, fixed sidelite
Transom	Optional
Available Options	Electrified Panels, Electric Lock, Armored Strike, Door Closers, Extra Detector Holding Beams, Nose Casters, Sidelite Protection, Aluminum Cart Bars, Exit Indicator, NABCO Conceal Sensor

Technical Information

Operator drive	Electro-mechanical
Drive system	Belt drive
Motor type	1/4 HP (peak) brushless
Primary circuit protection	Breaker
Controller	Microprocessor
Breakout	System disabled when panels break out
Operating voltage	120 VAC - 5 AMP
Auxiliary power output	12 VDC, 750 mA
Maximum door panel weight	600 lbs.
Switch modes	On/off, 1-way, 2-way, hold-open, night
Opening and closing speed	Adjustable
Reduced opening function	Standard
Obstacle detection	Available in both directions
Hold-open time	Adjustable

Selection Guide

Door Type	Frame Width	Door Opening	Breakout Opening
Single FSL	7' (1930) - 9' (2743)	36" (914) - 48" (1219)	39" (990) - 51" (1295)
Single FBO			76" (1930) - 100" (2794)
Bi-part FSL	10' (3048) - 18' (5486)	48" (1219) - 96" (2438)	54" (1371) - 102" (2590)
Bi-part FBO			104" (2642) - 200" (5080)

Code Compliance / Approvals

Code compliance	ANSI A156.10
Approvals	UL, ULC



Design Your New facility with NABCO Doors

Visit:

NABCOEntrances.com/Product/standard-sliding-door-gt1175/



Member of the Nabtesco Group



NABCO Entrances Inc.
582 W18717 Gemini Drive
Muskego, WI 53150
nabcoentrances.com
info@nabcoentrances.com
P 877-622-2694

Rev. 4-7-2025