

Automatic Sliding Door GT1175 with Opus Control

NABCO 



Now with On-board Programing Opus Controller

- Great for Airports & Transportation, Grocery & Retail, Healthcare, Hospitality, Malls, and many other applications
- Integral flush-glazed framing enhances the entrance appearance
- Large urethane door rollers for smooth and long-lasting operation
- Motorized belt-drive for silent operation
- Opus Control is engineered to withstand challenging environmental and weather conditions.
- Adjustable thermal brush system on the bottom of the door adds extra life
- Extra duty anodized roller track for long lasting durability
- Three rocker switches and an optional keyed switch system offer easy door control


GT1175 with Opus Control

The standard for smooth operation and quiet, whisper-like performance

The NABCO GT1175 with Opus Control is engineered to withstand challenging environmental and weather conditions. The ultra-quiet, high-performance GT1175 operator is the right solution for every automatic sliding door entrance.

GT1175 with Opus Control Header

Header cover is pre-wired for sensor installation and uses extra-thick aluminum extrusions to minimize deflection.

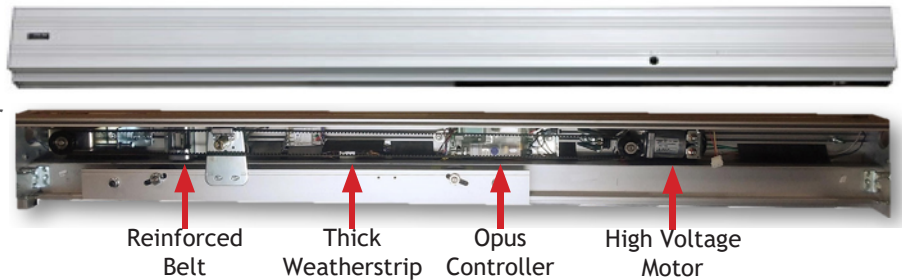

Product Information	
Header dimensions - standard	6 1/2"W (165.1) x 7 1/2"H (190.5)
Standard finish	Clear and dark bronze anodized
Optional finishes	Painted, clad, special anodized
Mounting	Concealed and surface-applied
Threshold Options	Surface-applied, recessed, none
Configurations	Single, bi-part / full breakout, fixed sidelite
Transom	Optional

Technical Information	
Operator drive	Electro-mechanical
Drive system	Belt drive
Motor type	1/4 HP (peak) brushless
Primary circuit protection	Breaker
Controller	Microprocessor
Breakout	System disabled when panels break out
Operating voltage	120 VAC - 5 AMP
Auxiliary power output	12 VDC, 750 mA
Maximum door panel weight	600 lbs.
Switch modes	On/off, 1-way, 2-way, hold-open, night
Opening and closing speed	Adjustable
Reduced opening function	Standard
Obstacle detection	Available in both directions
Hold-open time	Adjustable

Selection Guide			
Door Type	Frame Width	Door Opening	Breakout Opening
Single FSL	7' (1930) - 9' (2743)	36" (914) - 48" (1219)	39" (990) - 51" (1295)
Single FBO			76" (1930) - 100" (2794)
Bi-part FSL	10' (3048) - 18' (5486)	48" (1219) - 96" (2438)	54" (1371) - 102" (2590)
Bi-part FBO			104" (2642) - 200" (5080)

Code Compliance / Approvals	
Code compliance	ANSI A156.10
Approvals	UL, ULC

NABCO Service and Specifications

Along with the NABCO factory branches, NABCO has the largest independently owned network of automatic door distributors in north America. Their friendly, qualified installers and technicians always strive to exceed your expectations from install to after- sales service. AAADM-certified technicians at NABCO's branches and independent distributors ensure our doors meet all ANSI A156.10 standards. Complete three-part specifications and CAD drawings are available on NABCOentrances.com.



Member of the **Nabtesco** Group



NABCO Entrances Inc.
 582 W18717 Gemini Drive | Muskego, WI 53150
nabcoentrances.com | info@nabcoentrances.com
 P 877-622-2694 | F 888-679-3319

Distributed by: