

NABCO ENTRANCES TECHNICAL BULLETIN


Gyro Tech Lanson Parts Zone Gard
 S82 W18717 Gemini Drive
 Muskego, Wisconsin 53150
 Phone: 1-414-679-0045
 Fax (toll free): 1-888-679-3319

Effective Date: July 1, 1998

Who is the technical contact?
Michael Laeuger

Clarification of Surface Applied 1175 Dimensions

In discussions with several distributors, we felt clarification was necessary detailing some of the dimensions we design our *Surface Applied 1175 units* to and how this can assist in getting the unit desired.

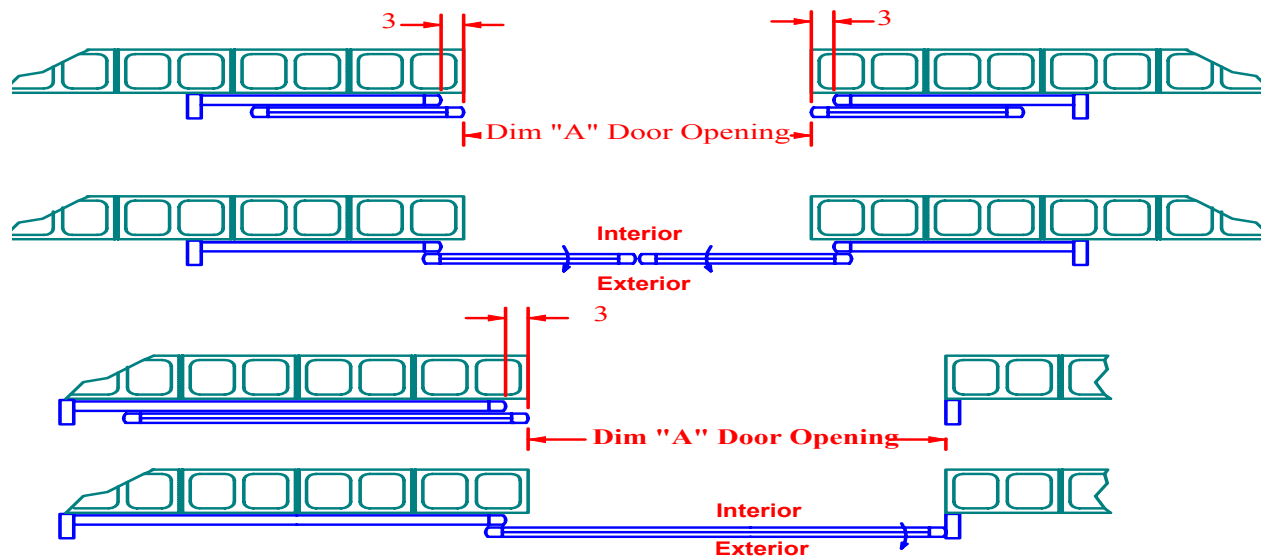

Because our cutting lists and order forms for standard size units are set up for even dimensioned openings for *any* of our units, it is simpler to maintain that terminology for surface applied units. Hence, a 42" single will have a 42" slide opening and 45" breakout opening (from the above drawing). This layout ensures that your customer will get the maximum usable door opening from his building opening.

However, the structural member or wall material that the unit is applied to will be visible at the back 3" of the door. If this is objectional to the customer, order a door opening that is 3" smaller than the opening in the building for a single or 6" smaller than the opening in the building for a bi-part. Please note that in this type of layout, the door will protrude into the opening by 3 inches.

Bulletin Number: **6**