



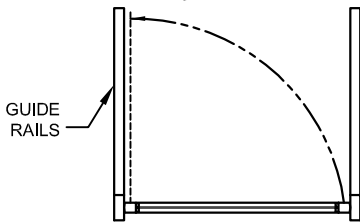


NABCO Entrances Inc.
S82 W18717 Gemini Drive Muskego, WI 53150
www.nabcoentrances.com 1-877-622-2694

JOB NAME: _____
LOCATION: _____
DISTRIBUTOR: _____
DOOR #: _____ DATE: _____
SHEET _____ OF _____


GT20-02L OHC
SIDELOAD HEADER
CENTER PIVOT
LEFT HAND
OUTSWING

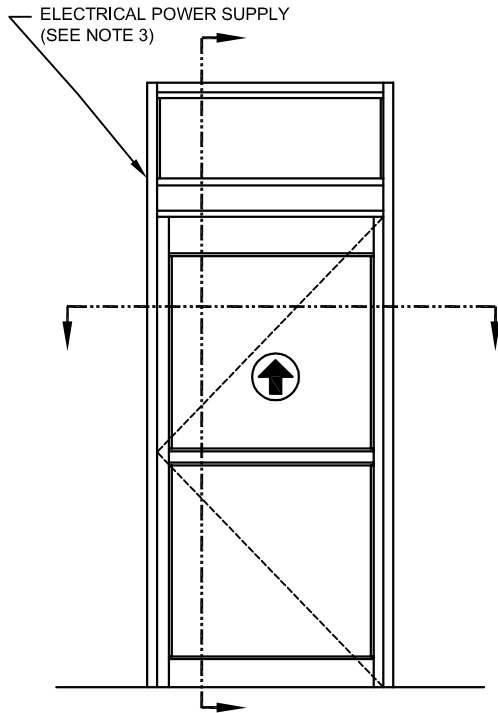


INTERIOR ELEVATION/PLAN




THRESHOLD AT FLOOR
PIVOT ASSEMBLY
FOR USE WITH
MAT & SENSOR CONTROL
COMBINATION



THRESHOLD AT FLOOR
PIVOT ASSEMBLY
FOR USE WITH
MAT CONTROLS

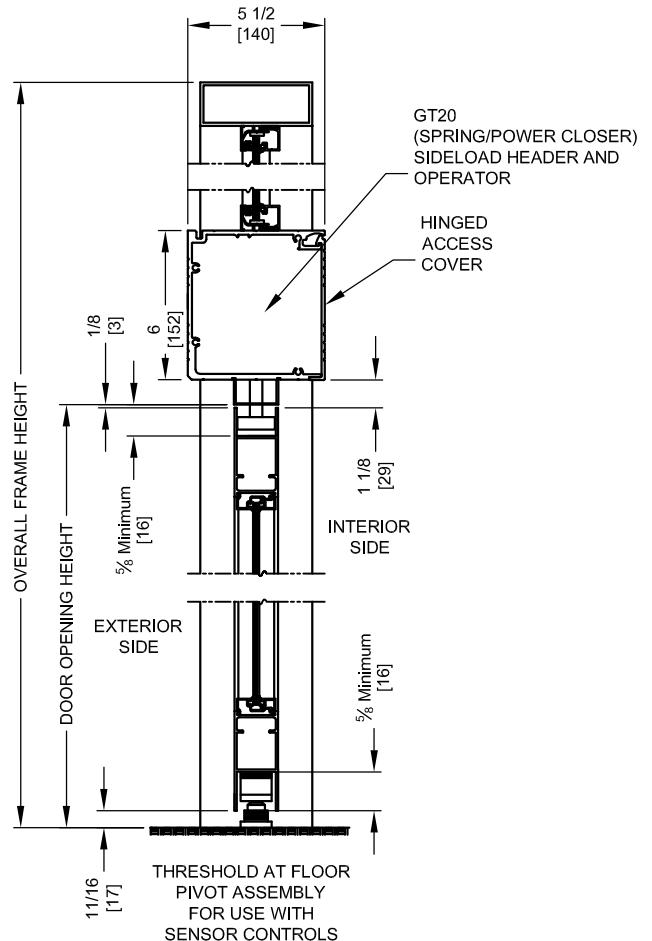

VERTICAL SECTION

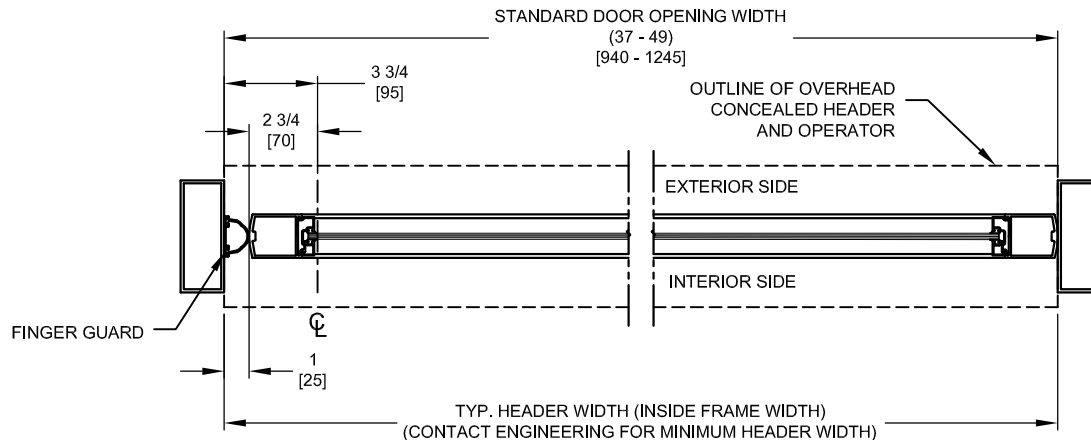

HORIZONTAL SECTION

NOTES:

1. GUIDE RAILS, MATS, PUSH PLATES AND VARIOUS ELECTRONIC DEVICES FOR THE DOOR ACTIVATION AND CONTROL ARE OPTIONAL. CONSULT WITH YOUR NABCO/GYRO TECH DISTRIBUTOR.
2. DOORS AND FRAMES ARE NOT INCLUDED UNLESS NOTED.
3. POWER TO HEADER WILL BE 115VAC, 5 AMP PER OPERATOR PROVIDED BY ELECTRICAL CONTRACTOR.
4. STANDARD HARDWARE SUPPLIED WILL ACCOMMODATE DOOR THICKNESS OF 1 3/4" TO 2 1/4".