

NABCO GT1175 Telescopic Automatic Sliding Door

NABCO



Product Features and Benefits

- On-board Programming Opus Controller
- Space-saving versatility with the elegant look of a large door opening
- Integral flush-glazed framing enhances the entrance appearance
- Large urethane door rollers for smooth and long-lasting operation

NABCO GT1175


Automatic Sliding Doors

Telescopic Bi-part and Single Doors

The NABCO GT1175 Telescopic Sliding Door puts your mind at ease when looking for an automatic door solution and limited space is a concern. This system combines the elegant look of a large, clear door opening with space-saving versatility. The durable, heavy-duty GT1175 Telescopic Sliding Door is engineered to withstand challenging environment and weather conditions while maintaining a smooth operation and quiet, whisper-like performance. NABCO's microprocessor control provides reliable door operation, important usage counts, and diagnostic features for quick troubleshooting and reduced maintenance costs, making this the ideal automatic door entrance solution for unique applications.

GT1175 with Opus Control Header

Header cover is pre-wired for sensor installation and uses extra-thick aluminum extrusions to minimize deflection.

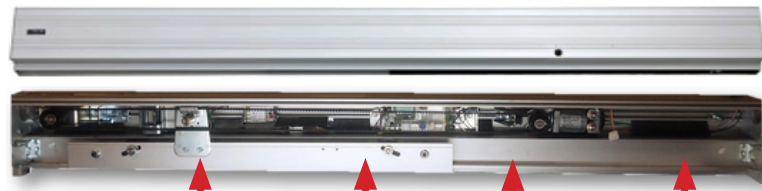

Thick Weatherstrip

Opus Controller


Low Voltage Motor

Reinforced Belt

Product Information	
Header dimensions	6 1/2"W (165.1) x 7 1/2"H (190.5)
Standard finish	Clear, dark bronze, or black anodized
Optional finishes	Painted, clad, special anodized
Mounting	Concealed
Threshold	Surface-applied, recessed, none
Configurations	Single, bi-part / full breakout, fixed sidelite
Transom	Optional

Technical Information	
Operator drive	Electro-mechanical
Drive system	Belt drive
Motor type	1/4 HP (peak) brushless
Primary circuit protection	Breaker
Controller	Microprocessor
Breakout	System disabled when panels break out
Operating voltage	120 VAC - 5 AMP
Auxiliary power output	12 VDC
Maximum door panel weight	600 lbs. total moving weight
Switch modes	On/off, 1-way, 2-way, hold-open, night
Opening and closing speed	Adjustable
Reduced opening function	Standard
Obstacle detection	Available in both directions
Hold-open time	Adjustable (0-67 seconds)

Code Compliance / Approvals	
Code compliance	ANSI A156.10
Approvals	UL, ULC

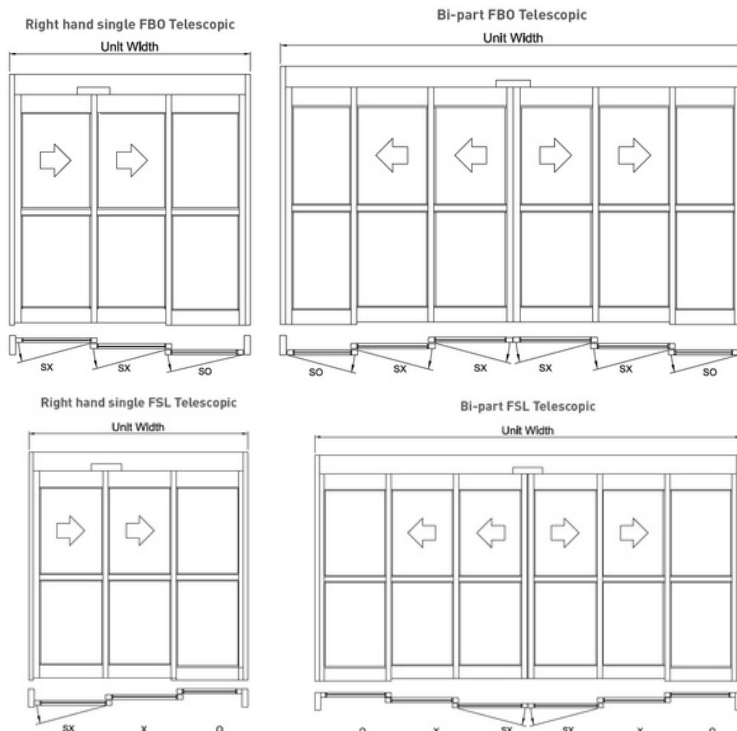

Selection Guide			
Door Type	Frame Width	Door Opening	Breakout Opening
3-panel FSL	5' 1 1/2" (1562) - 12' (3657)	31 1/8" (816) - 87 1/8" (2213)	35 1/2" (902) - 90 1/2" (2299)
3-panel FBO			51 1/2" (1308) - 134" (3404)
6-panel FSL	7' 11 1/2" (2425)	48 5/8" (1235) - 113" (2870)	60 5/8" (1540) - 125" (3175)
6-panel FBO	- 16' (4876)		79 1/2" (2019) - 176" (4470)



Design Your New Facility with NABCO Doors:

Visit:

NABCOEntrances.com/Product/telescopic-sliding-door-gt1175/



Member of the Nabtesco Group



NABCO Entrances Inc.
S82 W18717 Gemini Drive
Muskego, WI 53150
nabcoentrances.com
info@nabcoentrances.com
P 877-622-2694

Rev. 4-11-2025