

GT1505

Bump-Out Convenience Window

Where SERVICE meets SATISFACTION



Product Features and Benefits

- Food grade stainless steel **offering a hygienic surface**
- Double weathering **to provide an enhanced weather seal**
- Brushless motor **for quiet operation and extra-long life**
- LED Lighting on interior **for better visibility and added security**
- Customized reduced opening **being ECO-efficient by minimizing the time the window remains open**
- Optional Air Curtain **helps restrict insects and vehicle fumes from entering while increasing energy efficiency**
- Hip Sensor for hands-free operation of opening and closing the window **meeting the ergonomics needs of repetition and force**



GT1505 Bump-Out Convenience Windows

The exclusive line of NABCO's GT1505 Bump-Out Convenience Window brings the most reliable and durable product to the industry. The GT1505 provides a panoramic view, allowing more natural light in the workplace. Emphasizing convenience, the GT1505 is shipped pre-assembled, glazed and ready for installation with a front-load header, providing easy access for efficient maintenance. By combining high quality and lowest life-cycle cost with ease of use and maintenance, we meet the tough demands for any drive-through service environment. The flexibility of the GT1505 Bump-Out Convenience Window makes it ideal for quick service restaurants, retail stores, pharmacies and banks, as well as many more specialty applications.



Air curtain is integrated into the window, meeting health and safety requirements by deterring insects and pollutants from entering the building.



Interior LED lighting provides better visibility.




Reduced opening function minimizes the time the window remains open.


PRODUCT INFORMATION

Header Dimensions	6 1/2" x 7 1/2" (165.1mm x 190.5mm)
Standard Finish	Clear and dark bronze anodized
Optional finishes	Painted, special anodized
Configurations	Bi-part
Glass	1/4" Tempered or 7/8" Thermopane
Mode of Operation	Automatic and Manual
Mounting	Mounts into an opening
Operating Voltage	115 VAC - 5 AMP
Operator Drive	Electro-mechanical
Motor Type	1/10th HP brushless
LED Lighting	Standard
Switch Modes	Full Open/Partial Open
Opening and Closing Speed	Adjustable
Hold-Open Time	Adjustable
Stiles	Narrow
Food Grade Stainless Steel Counter	Standard
Hip Sensor	Standard
Heated Air Curtain	Optional (20 amp circuit required)
Approvals	UL, CSA

GT1505 Bump-Out Convenience Window

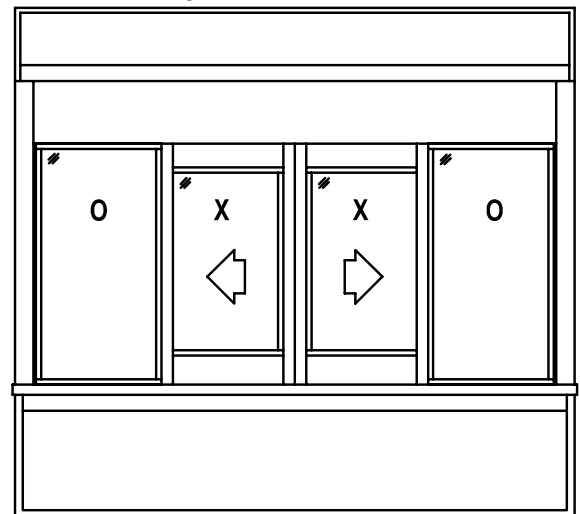

EXTERIOR ELEVATION

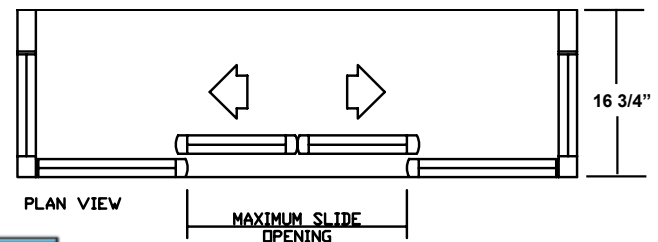

PLAN VIEW

MAXIMUM SLIDE
OPENING

SELECTION GUIDE

	WIDTH	HEIGHT	MAX. SLIDER OPENING
GT1505	53 1/2" (1359mm)	57 3/4" (1238mm)	21 1/2" (546.1mm)



Member of the Nabtesco Group

NABCO ENTRANCES INC.

582 W18717 Gemini Drive | Muskego, WI 53150 | 877-622-2694 | Fax 888-679-3319

www.NABCOentrances.com | Email info@NABCOentrances.com



Distributed by: