Technical Bulletin Technical Bul

NABCO ENTRANCES TECHNICAL BULLETIN

S82 W18717 Gemini Drive Muskego, WI, 53150

Phone: (877) 622-2694, Fax: (888) 679-3319

www.NabcoEntrances.com

Who is the contact?

Date: 5/24/18

Technical Support Department

Revised Specifications for NAX Hermetic Doors

The NAX hermetic sliding door package has undergone some changes since introduction. The three areas that have changed are as follows:


 The optional viewing window in the GT9100 and GT9300 now only comes in a flat frame. This change is to help prevent dust accumulation and enhance ease of cleaning.




Double-sided flat frame



2. The skin thickness on an aluminum door has increased from 1.5mm to 1.7mm. This increased thickness affects the maximum clear vertical and horizontal opening for the aluminum version only. The difference is small but needs to be accounted for, please see the following chart:

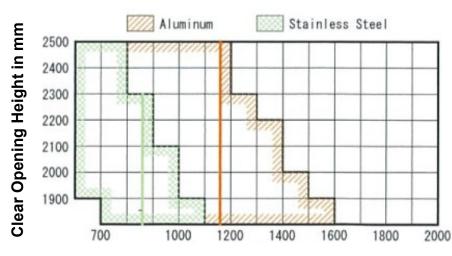

Clear Opening Width in mm



Bulletin Number: 95

Technical Bulletin Technical Bul

NABCO ENTRANCES TECHNICAL BULLETIN

S82 W18717 Gemini Drive Muskego, WI, 53150

Phone: (877) 622-2694, Fax: (888) 679-3319


www.NabcoEntrances.com

Who is the contact?
Technical Support Department

Date: 5/14/18

Revised Specifications for NAX Hermetic Doors

3. European airflow testing was performed and is now added to the specifications, BS EN12207.

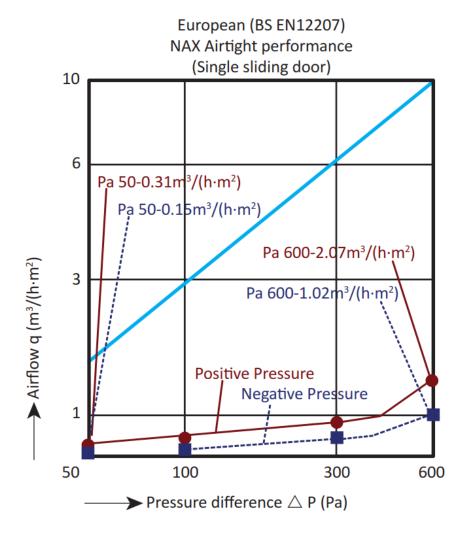

Bulletin Number: 95

Technical Bulletin Technical Bulletin Page 2 of 2 Technical Bulletin Technical Bulletin