





Key Switch; 4 Position; Model KS-15

Instruction Sheet

P/N C-00334 Rev 3-15-18

Nabco Entrances Inc. S82 W18717 Gemini Drive Muskego, Wisconsin 53150
 Phone: (877) 622-2694 Fax: (888) 679-3319 www.nabcoentrances.com
 NABCO hours of Operation: Monday to Friday 8:00 a.m.- 4:30 p.m. (Central Time)

SERVICE PARTS: KEY SWITCH 4 POSITION P/N A-01137

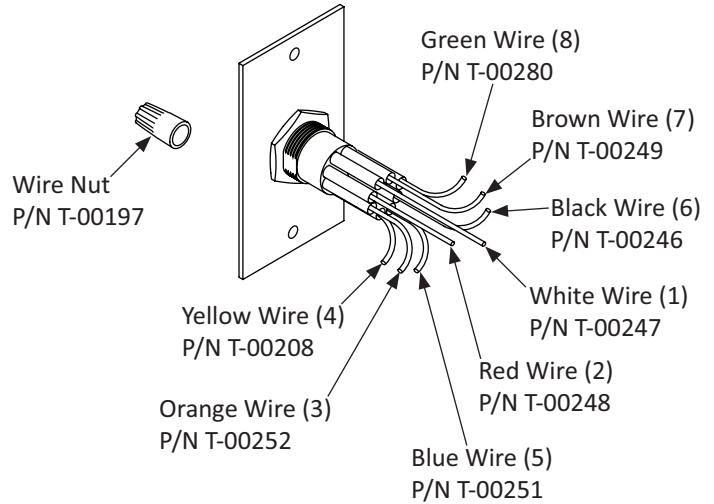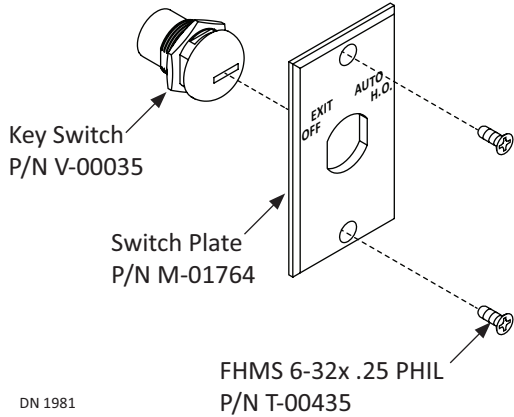

CHAPTER 1: PREPARE THE JAMB TUBE

1. Locate and drill a 1-1/4 inch diameter hole into the Jamb Tube (or other flat surface)
 - a. A jigsaw can be used to cut a rectangular hole.
2. Insert the Key Switch into the Jamb Tube.
3. Use the Switch Plate as a template to mark and drill (2) 7/64" screw holes.

CHAPTER 2: INSTALL THE KEY SWITCH

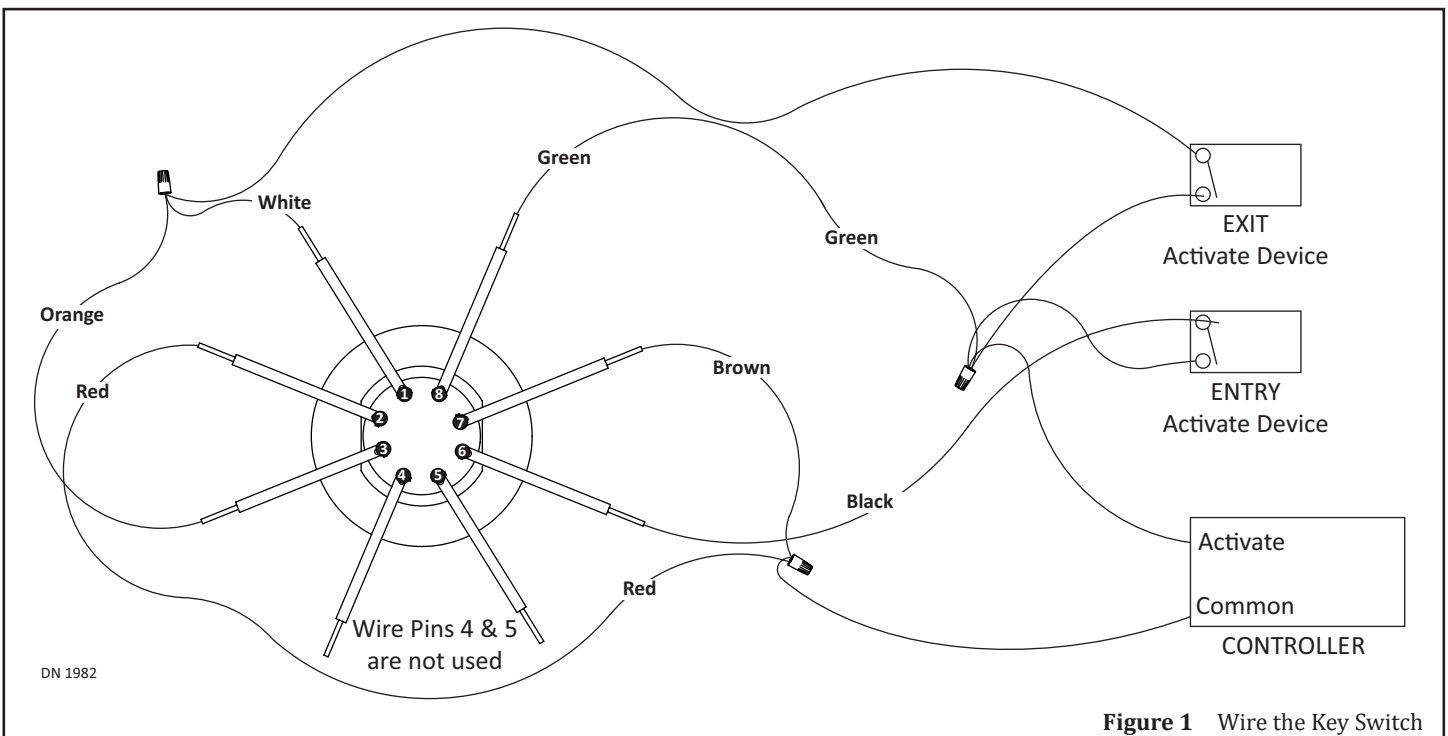


Figure 1 Wire the Key Switch

1. Wire as shown in Figure 1, or refer to the Contact Configuration shown in Figure 2 to wire as needed.
2. Secure the Key Switch Assembly to the Jamb Tube with (2) 6-32x .25 Phillips Head screws.

