

# All Glass Automatic Sliding Doors

with Opus Control



## Now with On-board Programming Opus Controller

- Eliminates vertical framing for a sleek, contemporary look
- Large urethane door rollers for smooth and long-lasting operation
- Belt drive and brushless motor system ensures silent and reliable operation

# Automatic Sliding Doors

The standard for smooth operation and quiet, whisper-like performance

The NABCO GT1175 All Glass Sliding Door eliminates vertical framing resulting in a sleek, contemporary look. The low-profile bottom rail allows a larger, unobstructed view that is perfect for enhancing an attractive lobby or well-manicured grounds. While elegant by design, the GT1175 All Glass Sliding Door is engineered to withstand challenging environment and weather conditions while maintaining smooth operation and quiet, whisper-like performance. NABCO's microprocessor control provides reliable door operation, important usage counts, and diagnostic features for quick troubleshooting and reduced maintenance costs, making this a seamless automatic door entrance solution.

Product Information	
Header dimensions	6 1/2"W (165.1) x 7 1/2"H (190.5)
Standard finish	Clear, dark bronze, or black anodized
Optional finishes	Painted, clad, special anodized
Mounting	Concealed and surface-applied
Threshold	Surface-applied, recessed, none
Configurations	Single, bi-part / full breakout, fixed sidelite
Transom	Optional
Technical Information	
Operator drive	Electro-mechanical
Drive system	Belt drive
Motor type	1/4 HP (peak) brushless
Primary circuit protection	Breaker
Controller	Microprocessor
Breakout	System disabled when panels break out
Operating voltage	120 VAC - 5 AMP
Auxiliary power output	12 VDC
Maximum door panel weight	600 lbs.
Switch modes	On/off, 1-way, 2-way, hold-open, night
Opening and closing speed	Adjustable
Reduced opening function	Standard
Obstacle detection	Available in both directions
Hold-open time	Adjustable (0-67 seconds)
Code Compliance / Approvals	
Code compliance	ANSI A156.10
Approvals	UL, ULC, CSA and CSFM




## GT1175 with Opus Control Header

Header cover is pre-wired for sensor installation and uses extra-thick aluminum extrusions to minimize deflection.

Left hand single slide – fixed sidelite

Right hand single slide – fixed sidelite

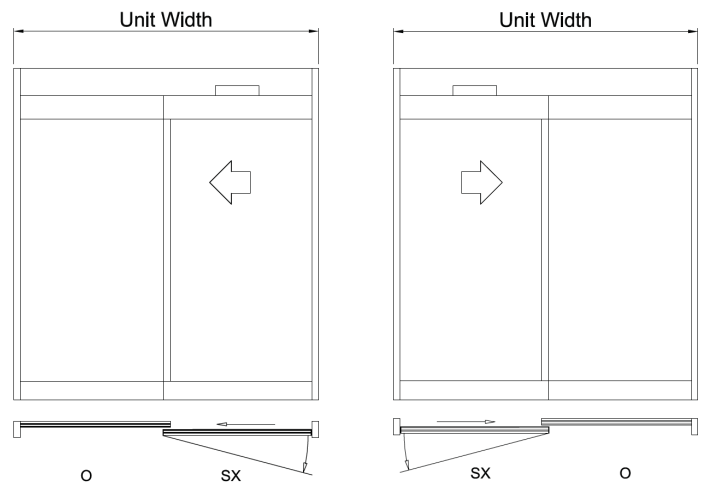

Selection Guide			
Door Type	Frame Width	Door Opening	Breakout Opening
Single FSL	7' (1930) - 9' (2743)	36" (914) - 48" (1219)	39" (990) - 51" (1295)
Bi-part FSL	10' (3048) - 14' (4267)	48" (1219) - 96" (2438)	54 3/4" (1371) - 79 3/4" (2026)

## NABCO Service and Specifications

Along with the NABCO factory branches, NABCO has the largest independently owned network of automatic door distributors in north America. Their friendly, qualified installers and technicians always strive to exceed your expectations from install to after-sales service. AAADM-certified technicians at NABCO's branches and independent distributors ensure our doors meet all ANSI A156.10 standards. Complete three-part specifications and CAD drawings are available on [NABCOentrances.com](http://NABCOentrances.com).



Member of the **Nabtesco** Group



NABCO Entrances Inc.  
 S82 W18717 Gemini Drive | Muskego, WI 53150  
[nabcoentrances.com](http://nabcoentrances.com) | [info@nabcoentrances.com](mailto:info@nabcoentrances.com)  
 P 877-622-2694 | F 888-679-3319

Distributed by: