

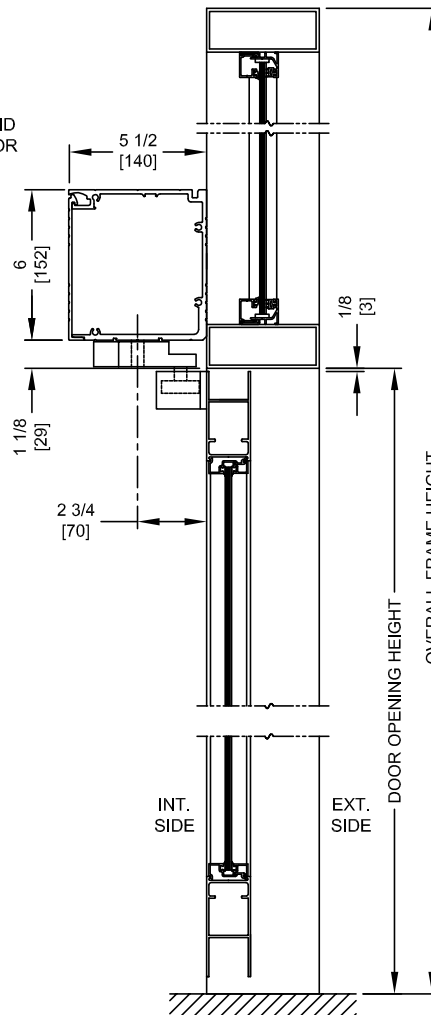


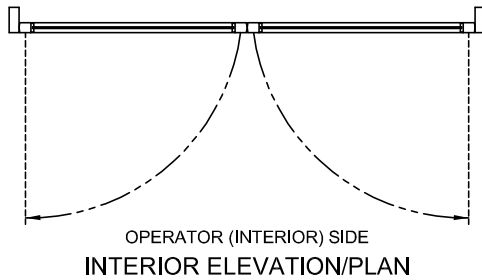


NABCO Entrances Inc.
S82 W18717 Gemini Drive Muskego, WI 53150
www.nabcoentrances.com 1-877-622-2694

JOB NAME: _____
LOCATION: _____
DISTRIBUTOR: _____
DOOR #: _____ DATE: _____
SHEET ____ OF ____


GT8710-03OPR
OPMAN RIGHT HAND
PAIR
INSWING

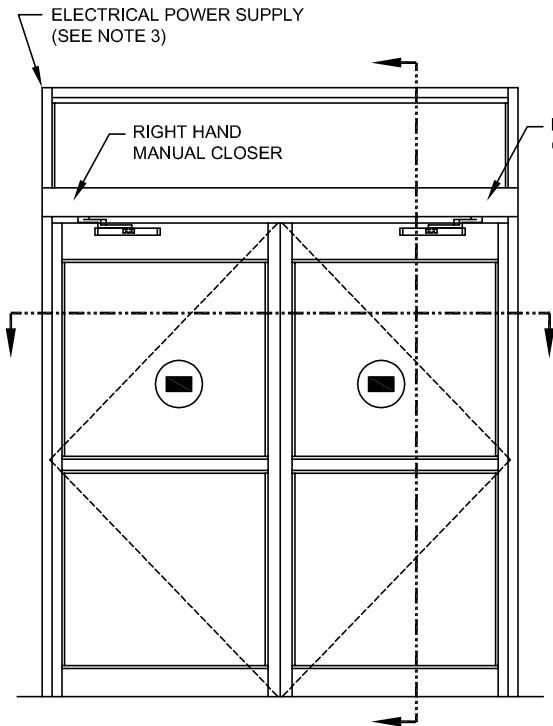


VERTICAL SECTION
BUTT/OFFSET PIVOT OPTION

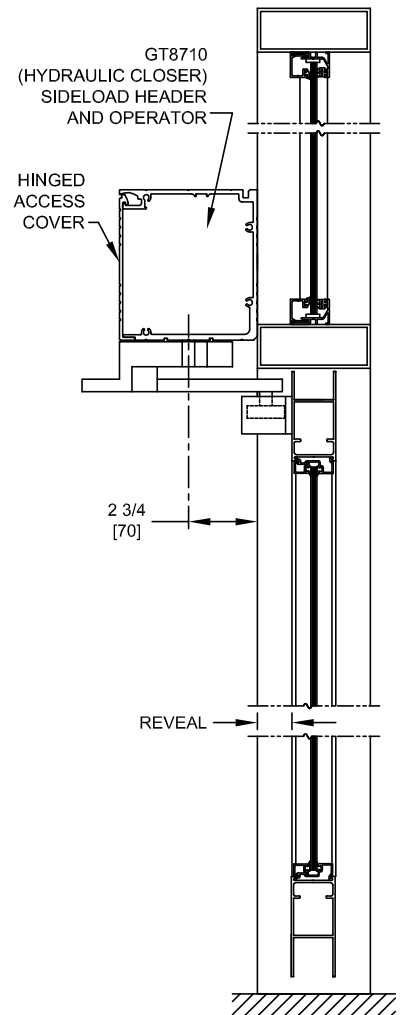

VERTICAL SECTION
CENTER PIVOT OPTION

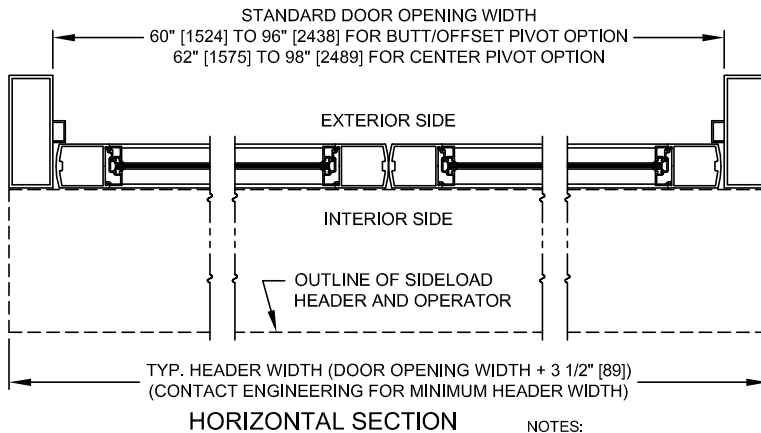

HORIZONTAL SECTION

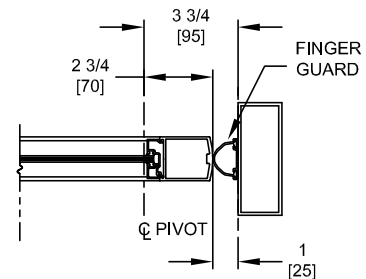

HINGE JAMB AT CENTER
PIVOT OPTION

NOTES:

1. GUIDE RAILS, MATS, PUSH PLATES AND VARIOUS ELECTRONIC DEVICES FOR THE DOOR ACTIVATION AND CONTROL ARE OPTIONAL. CONSULT WITH YOUR NABCO/GYRO TECH DISTRIBUTOR.
2. DOORS AND FRAMES ARE NOT INCLUDED UNLESS NOTED.
3. POWER TO HEADER WILL BE 115VAC, 5 AMP PER OPERATOR PROVIDED BY ELECTRICAL CONTRACTOR.
4. STANDARD HARDWARE SUPPLIED WILL ACCOMODATE DOOR THICKNESS OF 1 3/4" TO 2 1/4".
5. APPLICATION ON BALANCE DOORS REQUIRES RELOCATION OF THE OPERATOR PIVOT.
6. OPMAN IS MANUAL OPERATOR ON THE RIGHT HAND INTSWING DOOR AND AN AUTOMATIC OPERATOR ON THE LEFT HAND INTSWING DOOR

LOW ENERGY

Effective Date: 9-24-21