NABCO Entrances Inc.
S82 W18717 Gemini Drive Muskego, WI 53150
www.nabcoentrances.com 1-877-622-2694

JOB NAME: _____

LOCATION: _____

DISTRIBUTOR: _____

DOOR #: _____ DATE: _____

SHEET____ OF ____

GT2400A-RH

SINGLE SLIDE
RIGHT HAND
FULL OPEN
TRACKLESS

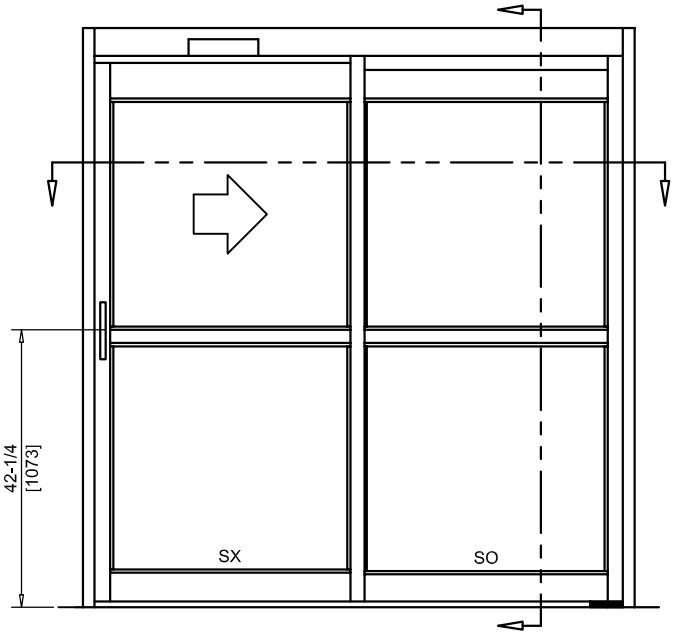

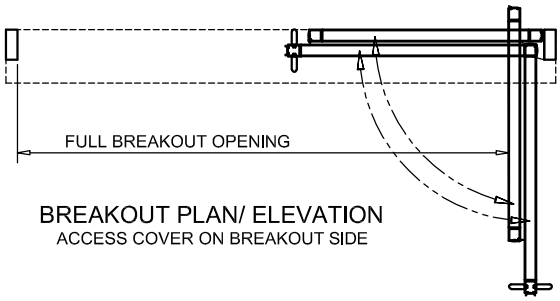

BREAKOUT PLAN/ ELEVATION
ACCESS COVER ON BREAKOUT SIDE

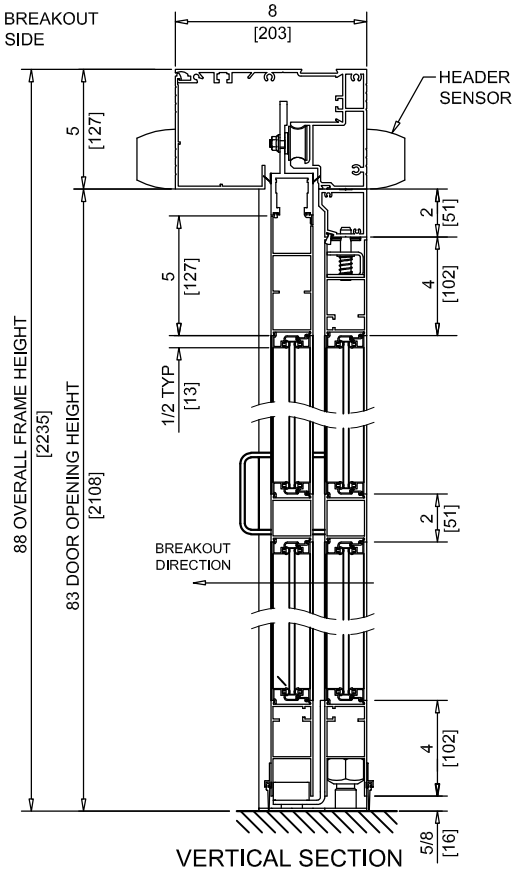

VERTICAL SECTION
(WITH DOOR OPEN)

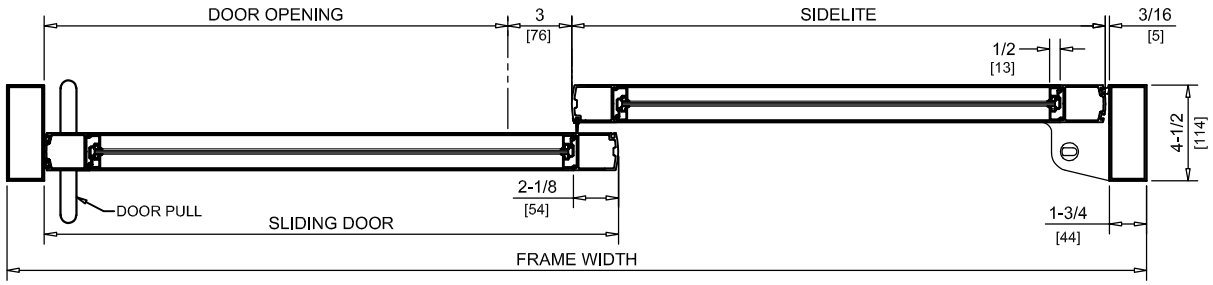

HORIZONTAL SECTION



FLOOR MOUNTED PIVOT ASSEMBLY
(VIEWED FROM PIVOT JAMB.
SLIDE PANEL NOT SHOWN FOR CLARITY)

FRAME WIDTH	DOOR OPENING	FULL BREAKOUT OPENING	DOOR PANEL	SIDELITE PANEL
84" [2134]	37.15" [944]	75.625" [1921]	42.375" [1076]	40" [1016]
96" [2438]	43.15" [1096]	87.625" [2226]	48.375" [1229]	46" [1168]
102" [2591]	46.15" [1172]	93.625" [2378]	51.375" [1305]	49" [1245]
108" [2743]	49.15" [1248]	99.625" [2530]	54.375" [1381]	52" [1321]

NOTES:

NO FLOOR TRACK TO INTERFERE WITH TRAFFIC.
BREAKOUT ONLY FROM FULL OPEN POSITION.
UNITS ARE HANDED FROM BREAKOUT SIDE.
ROUGH OPENING EQUALS FRAME WIDTH +1/2" AND FRAME HEIGHT +1/4".
SELF SUPPORTING, NOT OVERHEAD STRUCTURAL ANCHORING REQUIRED

STANDARD PACKAGE :

- 115VAC, 5 AMP CONTROLLER/OPERATOR
- LOW ENERGY CONTROL
- HEADER MOUNTED SENSORS
- ON/OFF/HOLD OPEN ROCKER SWITCH
- 204 CLEAR ANODIZED FINISH
- NARROW STILES (2-1/8")
- 1/2" TALL GLASS STOPS FOR 1/4" GLASS
- 2" MUNTIN, 42-1/4" FROM FINISHED FLOOR
- 4" BOTTOM RAILS
- VINYL WEATHERING

AVAILABLE OPTIONS

- PHOTOEYES
- TOUCHLESS SWITCHES
- SPECIAL FINISHES
- ALTERNATIVE GLASS SIZES UP TO 1" THICK
- 6-1/2" & 10" BOTTOM RAILS
- SMOKE RATING PACKAGE (COMPLIANT WITH UL1784 & NFPA 105)

Effective Date: 1 FEB 2022