


NABCO SWING

SWING DOOR OPERATOR

NABCO

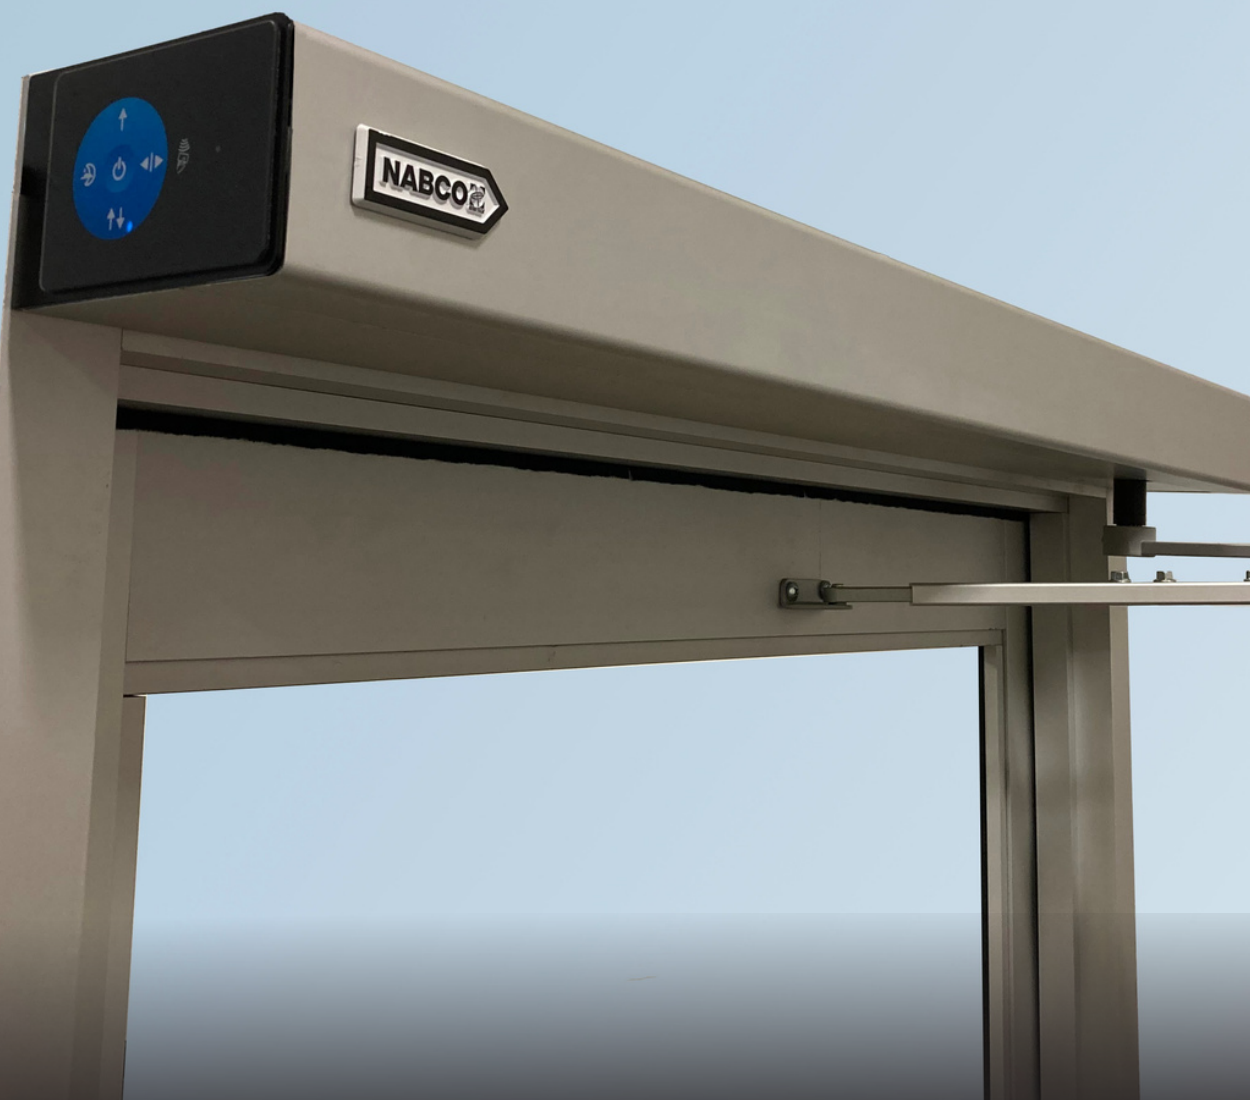

Designed for Dexterity to Accomodate Many Applications

- Including: Healthcare, Hospitality, Retail, and Office Buildings

A New Non-Handed, Low-Profile Swing Door Operator

- Non-handed gear assembly; easy plug-and-play motor connection enabling the use of a standard unit in both left-and right-hand applications
- Low-profile 3" high header assembly allows for installation in tight spaces.
- NABCO Connect App enabled for opening, closing, and mode switch scheduling.
- Easily adjusted arm assemblies with simple pre-load methods allow for easy customization at the time of installation.
- New, easy-to-remove, snap-and-click cover design that provides a robust "snap" when installed across the full length of the header.

NABCO SWING

NABCO SWING Series

No Order Form Needed to order Standard Door Operators

Standard Part #: GT630-[Application Code]-[Finish Code]-[Door Width Code]

Application		Reveal	Application Code
Single	Outswing	0-12"	OUT
	Inswing	0"	IN-NR
		0-6"	IN-WR
Sim Pair	Outswing	0-12"	SPO
	Inswing	0"	SPI
		0-6"	SPIR

Finish	Finish Code
Clear (204)	6
Dark Bronze	7

Doors	Header Length	Door Opening	Door Width Code
Single	39.5"	36"	39.5
Single	51.5"	51"	51.5
Sim Pair	75.5"	36"	75.5

Example Standard Part #: NABCO SWING, 51.5" Wide, Single, Outswing with 0-12" Reveal, in Dark Bronze: GT630-OUT-7-51.5

Email your PO to customerservice@nabcoentrances.com; Include: "STANDARD PART #", your shipping address, and Preferred Shipping Method

Order in Quantities with Standard Sizing

Low-Profile Header Designed to Accommodate Many Applications Specifications

Header Dimensions: 3" H x 4 3/4" D

Standard Finish: Clear or Dark Bronze Anodized

Mounting: Surface Applied

Installation Types: Push or Pull

Door Panel Max Weight: 330 lbs.

Adjustable Open Close: Force and Speed

Adjustable Opening Angle: 90° to 105° +

Code Compliance and Approvals:


ANSI A156.19 / ANSI A117.1. UL, ULC

New NABCO Connect

NABCO Connect is a smart switch allowing the user to change the mode from the side of the swing header. You can also download the associated NABCO Connect app for Apple or Android to perform the same function from your personal device.

Swing Arm & Drop Spindle Options

Outswing arm adjustable from 0 to 12" and extension options are available for reveals from 12-18". For inswing Arms add-on extensions are available for reveals of 6 to 12". Drop-in spindle design eliminates the need for spindle extensions that commonly have issues with coming loose. A 4" spindle is standard for inswing applications, 5" for outswing applications, and 6" spindle is available for specials applications.

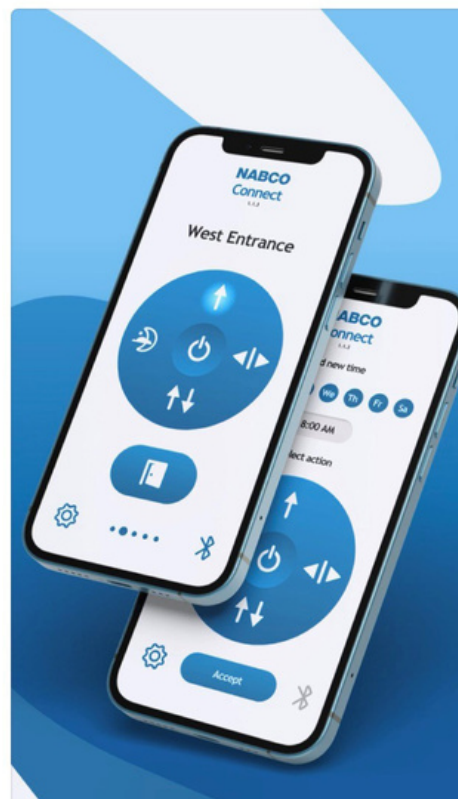

Design Your New facility with NABCO Doors:

Visit: NABCOEntrances.com/SWINGOPERATORS



Member of the Nabtesco Group



NABCO Entrances Inc.
582 W18717 Gemini Drive
Muskego, WI 53150
NABCOEntrances.com
info@NABCOEntrances.com
P 877-622-2694

Rev. 4-7-2025