




NABCO Entrances Inc.
S82 W18717 Gemini Drive Muskego, WI 53150
www.nabcoentrances.com 1-877-622-2694

JOB NAME: _____
LOCATION: _____
DISTRIBUTOR: _____
DOOR #: _____ DATE: _____
SHEET _____ OF _____

WHISPER SLIDE GT1175-11 PANIC EXIT HARDWARE

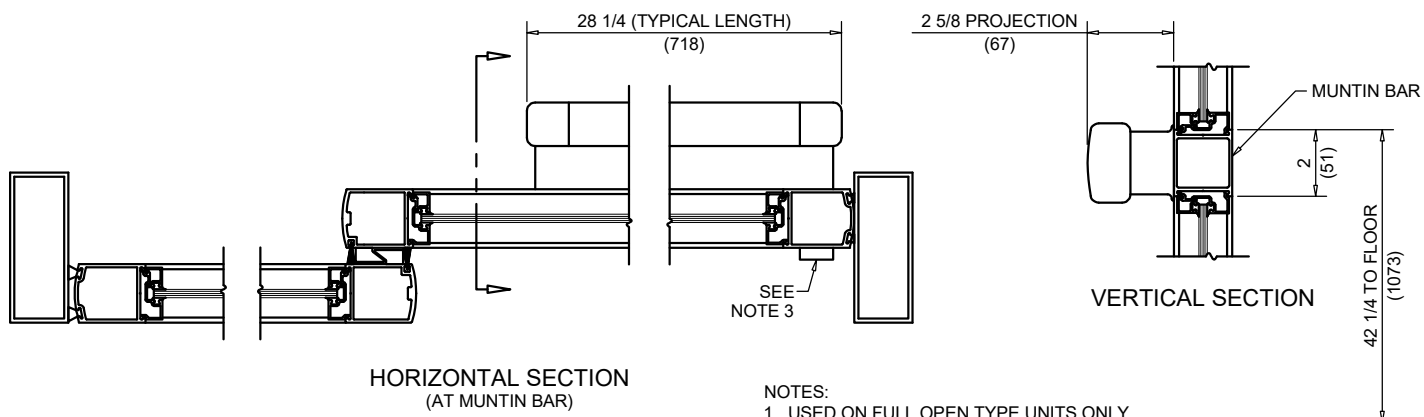


HORIZONTAL SECTION
(AT MUNTIN BAR)

VERTICAL SECTION

NOTES:

1. USED ON FULL OPEN TYPE UNITS ONLY.
2. SINGLE SLIDE UNIT SHOWN. HARDWARE CAN ALSO BE USED WITH BI-PART CONFIGURATION.
3. EXTERIOR CYLINDER INSTALLED ON DOOR.
4. 22" MINIMUM LENGTH MUNTIN BAR REQUIRED.

G1175 SURFACE APPLIED PUSH BAR
EXIT HARDWARE

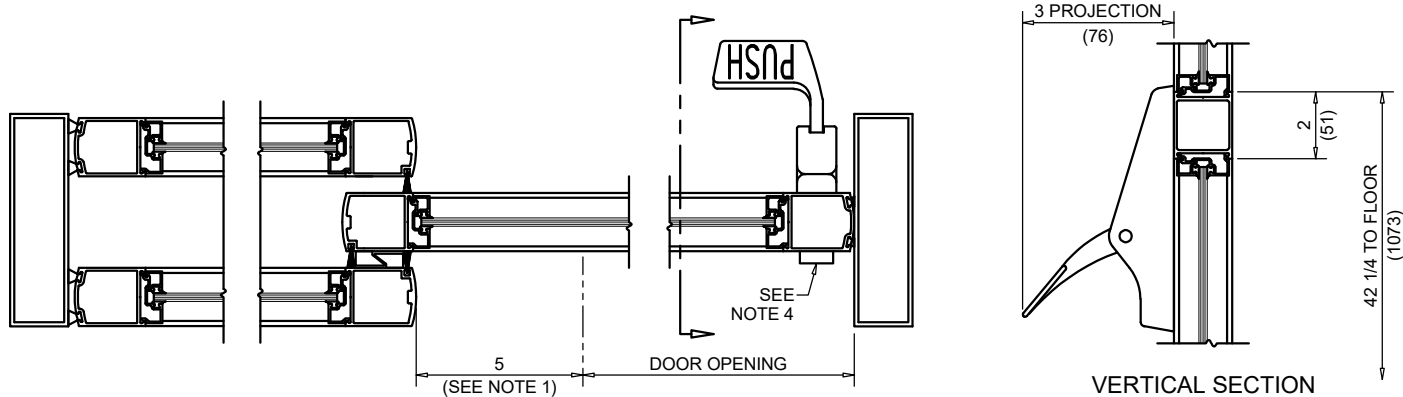


HORIZONTAL SECTION
(AT MUNTIN BAR)

VERTICAL SECTION

NOTES:

1. CLEARANCE REQUIRED AT DOOR FULL OPEN POSITION WITH PADDLE EXIT DEVICE INSTALLATION.
2. CHECK LOCAL CODES FOR PRODUCT CONFORMANCE.
3. SINGLE SLIDE POCKETED UNIT SHOWN. HARDWARE CAN ALSO BE USED WITH BI-PART AND FIXED OR FULL OPEN SIDELITE CONFIGURATIONS.
4. EXTERIOR CYLINDER INSTALLED ON DOOR.

G1175 PADDLE
EXIT HARDWARE

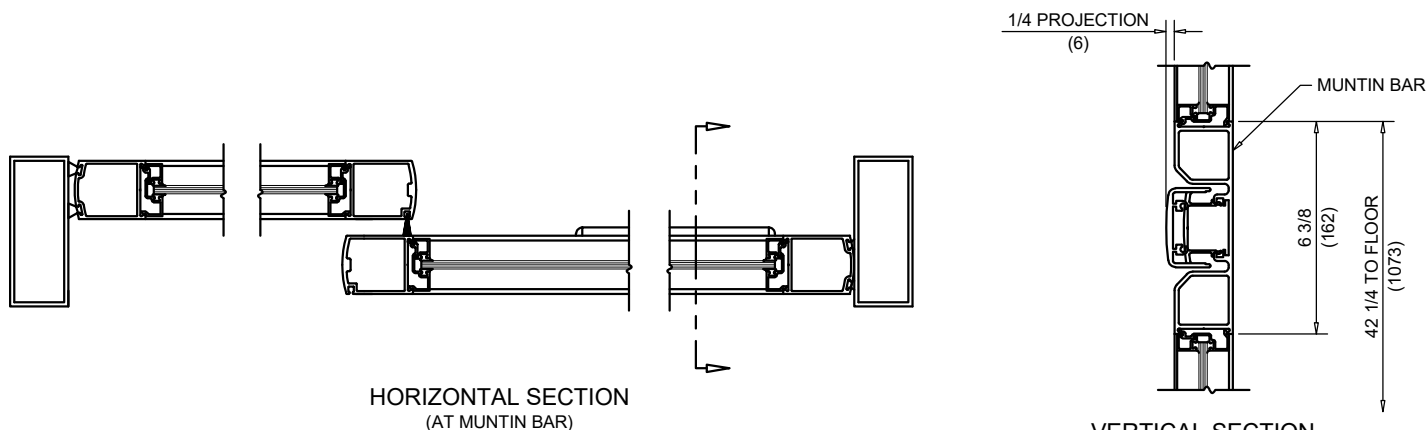

HORIZONTAL SECTION
(AT MUNTIN BAR)

VERTICAL SECTION

NOTES:

1. SINGLE SLIDE UNIT SHOWN. HARDWARE CAN ALSO BE USED WITH BI-PART AND FIXED OR FULL OPEN SIDELITE CONFIGURATIONS.
2. NOT AVAILABLE WITH EXTERIOR CYLINDER.
3. 25" MINIMUM LENGTH MUNTIN BAR REQUIRED.

G1175 RECESSED PUSH BAR
EXIT HARDWARE