





NABCO Entrances Inc.
S82 W18717 Gemini Drive Muskego, WI 53150
www.nabcoentrances.com 1-877-622-2694

JOB NAME: _____
LOCATION: _____
DISTRIBUTOR: _____
DOOR #: _____ DATE: _____
NABCO SWING
630-IN-NR-LH
INSWING
LEFT HAND


SHEET _____ OF _____

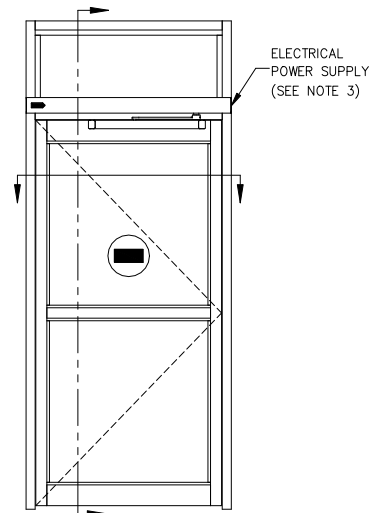

OPERATOR (INTERIOR) SIDE
INTERIOR ELEVATION/PLAN

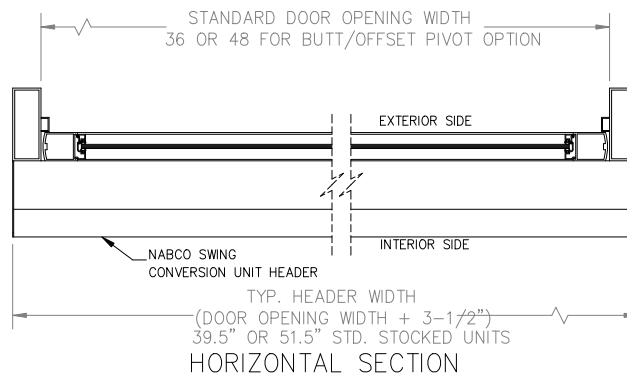


HORIZONTAL SECTION

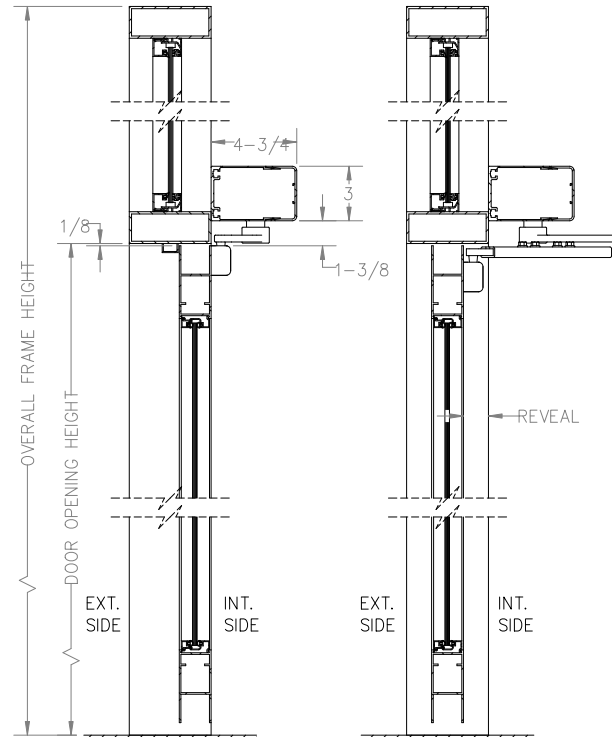

VERTICAL SECTION
BUTT/OFFSET PIVOT OPTION

VERTICAL SECTION
CENTER PIVOT OPTION OR
BUTT/OFFSET PIVOT W/ REVEAL

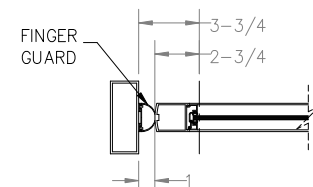

HINGE JAMB AT
CENTER PIVOT OPTION

NOTES:

1. PUSH PLATES, SENSORS, GUIDE RAILS AND VARIOUS ELECTRONIC DEVICES FOR THE DOOR ACTIVATION AND CONTROL ARE OPTIONAL. CONSULT WITH YOUR CERTIFIED NABCO DISTRIBUTOR.
2. DOORS AND FRAMES ARE NOT INCLUDED UNLESS NOTED.
3. POWER TO HEADER WILL BE 115VAC, 5 AMP PER OPERATOR PROVIDED BY ELECTRICAL CONTRACTOR.
4. STANDARD HARDWARE SUPPLIED WILL ACCOMODATE DOOR THICKNESS OF 1-3/4" TO 2-1/4".