

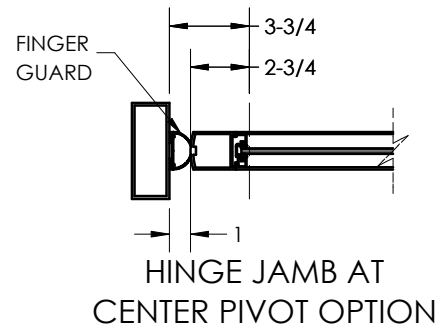
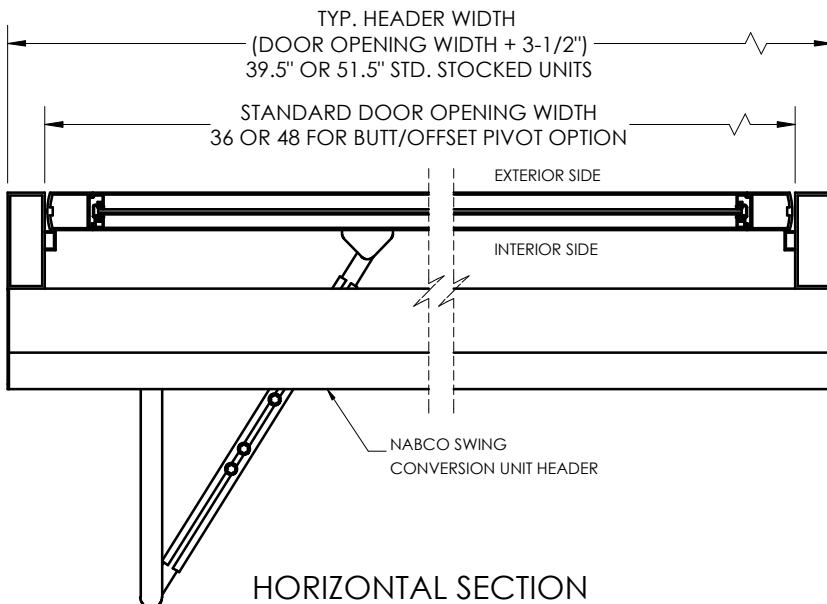


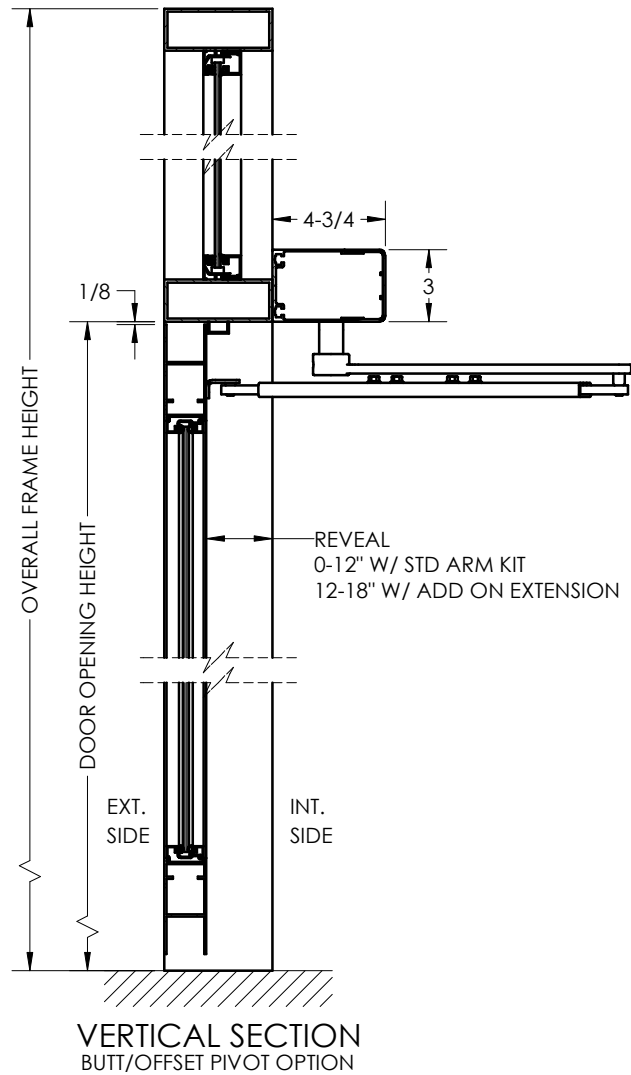

NABCO Entrances Inc.
582 W18717 Gemini Drive Muskego, WI 53150
www.nabcoentrances.com 1-877-622-2694

JOB NAME: _____
LOCATION: _____
DISTRIBUTOR: _____
DOOR#: _____ DATE: _____
SHEET _____ OF _____

**NABCO SWING
630-OUT-LH**
OUTSWING
LEFT HAND

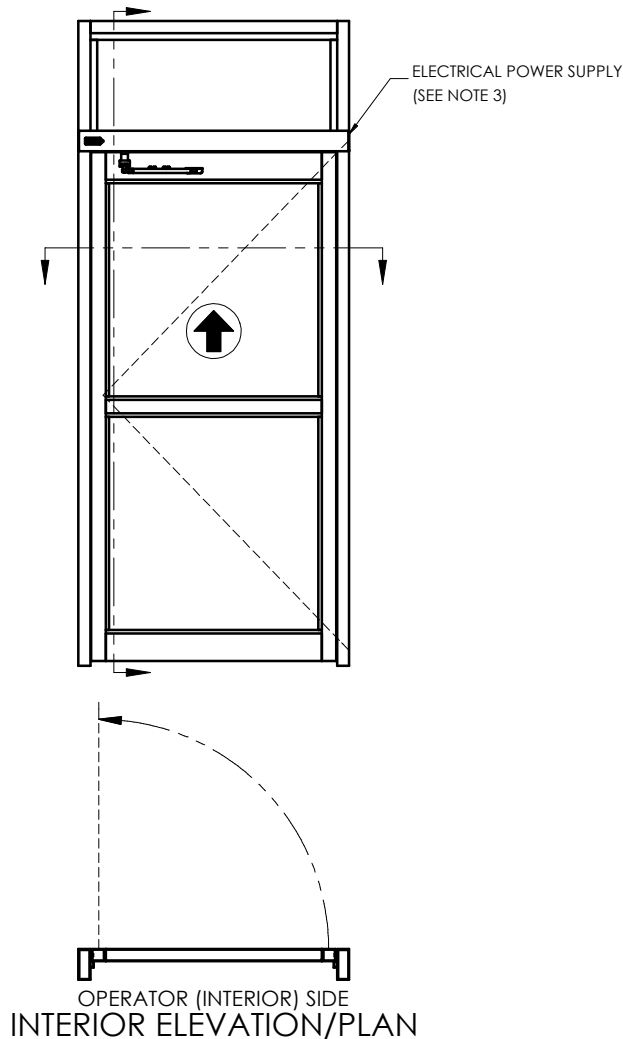

NOTES:





1. PUSH PLATES, SENSORS, GUIDE RAILS AND VARIOUS ELECTRONIC DEVICES FOR THE DOOR ACTIVATION AND CONTROL ARE OPTIONAL. CONSULT WITH YOUR CERTIFIED NABCO DISTRIBUTOR.
2. DOORS AND FRAMES ARE NOT INCLUDED UNLESS NOTED.
3. POWER TO HEADER WILL BE 115VAC, 5 AMP PER OPERATOR PROVIDED BY ELECTRICAL CONTRACTOR.
4. STANDARD HARDWARE SUPPLIED WILL ACCOMMODATE DOOR THICKNESS OF 1-3/4" TO 2-1/4".



NABCO Entrances Inc.
582 W18717 Gemini Drive Muskego, WI 53150
www.nabcoentrances.com 1-877-622-2694

JOB NAME: _____
LOCATION: _____
DISTRIBUTOR: _____
DOOR#: _____ DATE: _____
SHEET _____ OF _____

**NABCO SWING
630-OUT-RH**
OUTSWING
RIGHT HAND

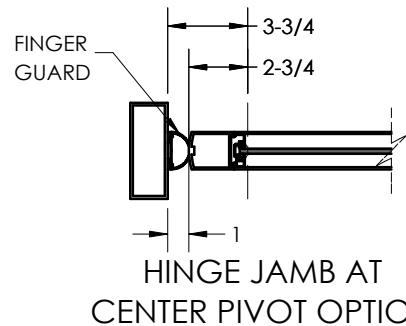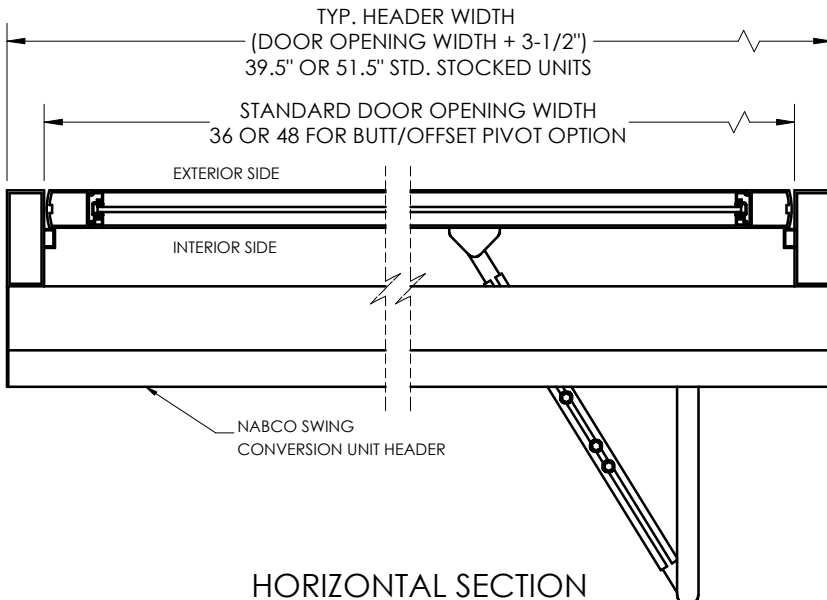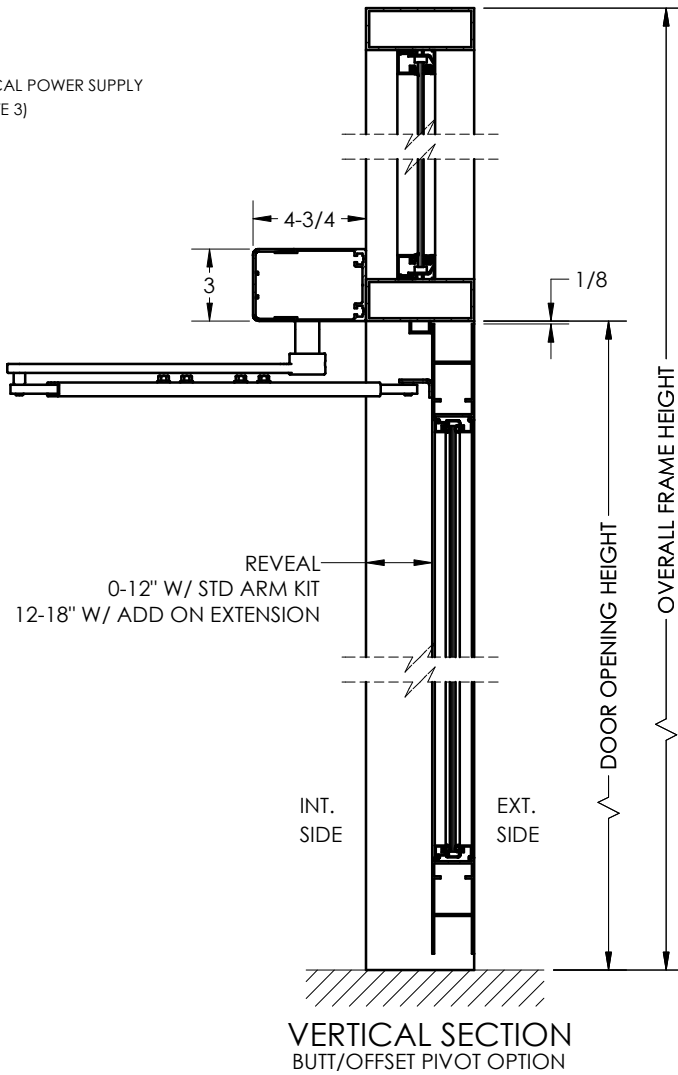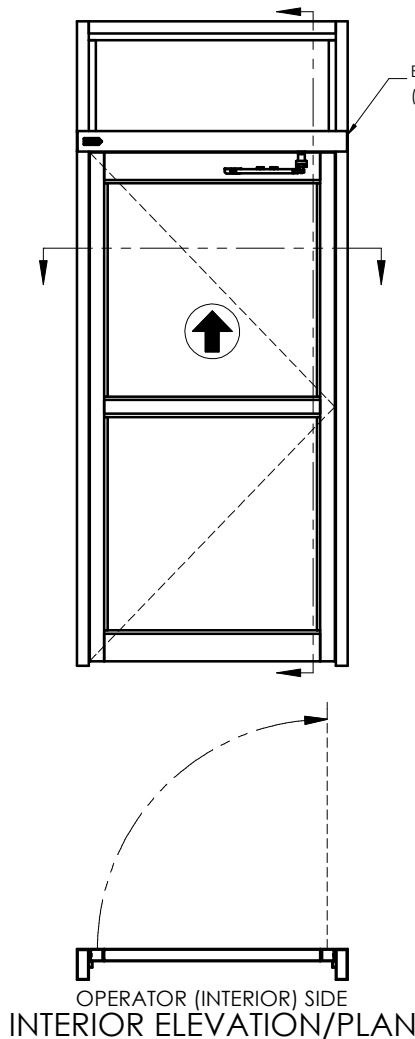

NOTES:






1. PUSH PLATES, SENSORS, GUIDE RAILS AND VARIOUS ELECTRONIC DEVICES FOR THE DOOR ACTIVATION AND CONTROL ARE OPTIONAL. CONSULT WITH YOUR CERTIFIED NABCO DISTRIBUTOR.
2. DOORS AND FRAMES ARE NOT INCLUDED UNLESS NOTED.
3. POWER TO HEADER WILL BE 115VAC, 5 AMP PER OPERATOR PROVIDED BY ELECTRICAL CONTRACTOR.
4. STANDARD HARDWARE SUPPLIED WILL ACCOMMODATE DOOR THICKNESS OF 1-3/4" TO 2-1/4".



NABCO Entrances Inc.
582 W18717 Gemini Drive Muskego, WI 53150
www.nabcoentrances.com 1-877-622-2694

JOB NAME: _____
LOCATION: _____
DISTRIBUTOR: _____
DOOR#: _____ DATE: _____
SHEET _____ OF _____

**NABCO SWING
630-IN-NR-RH**
INSWING
RIGHT HAND

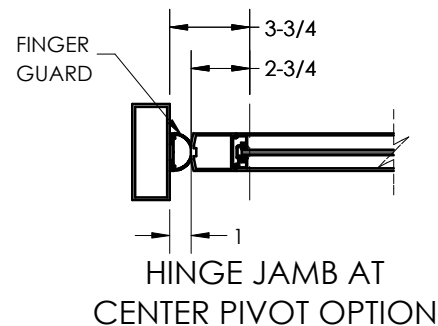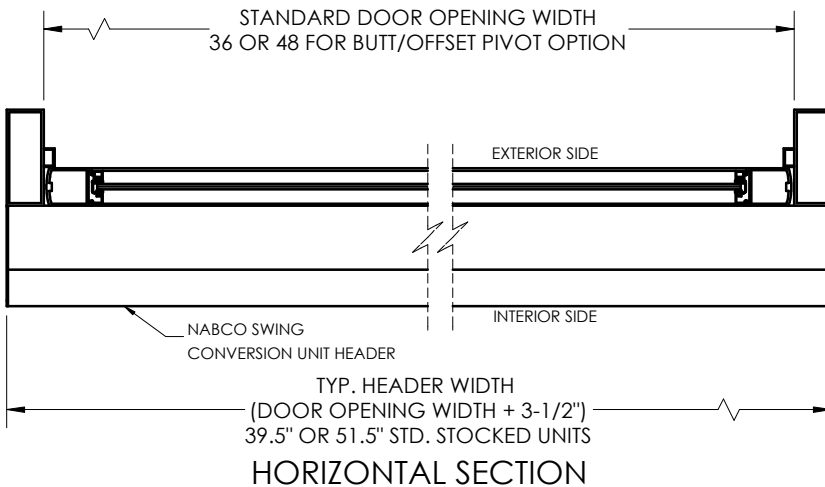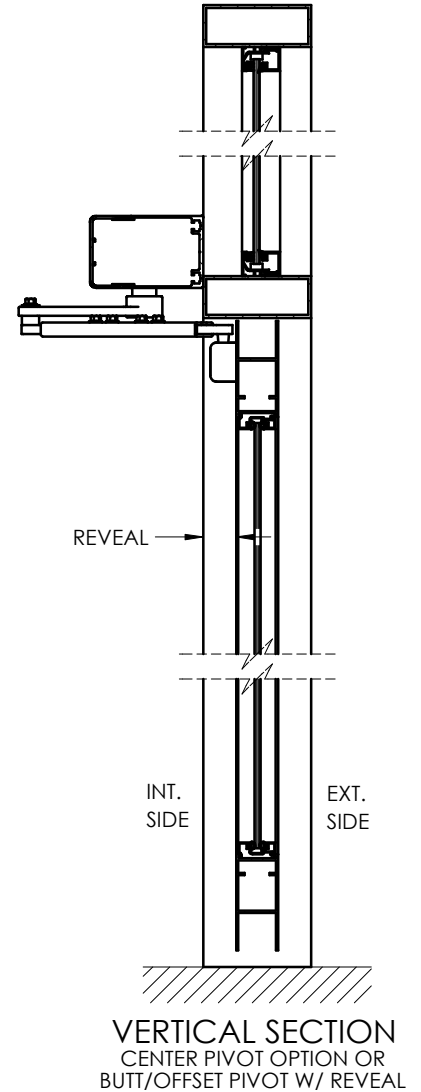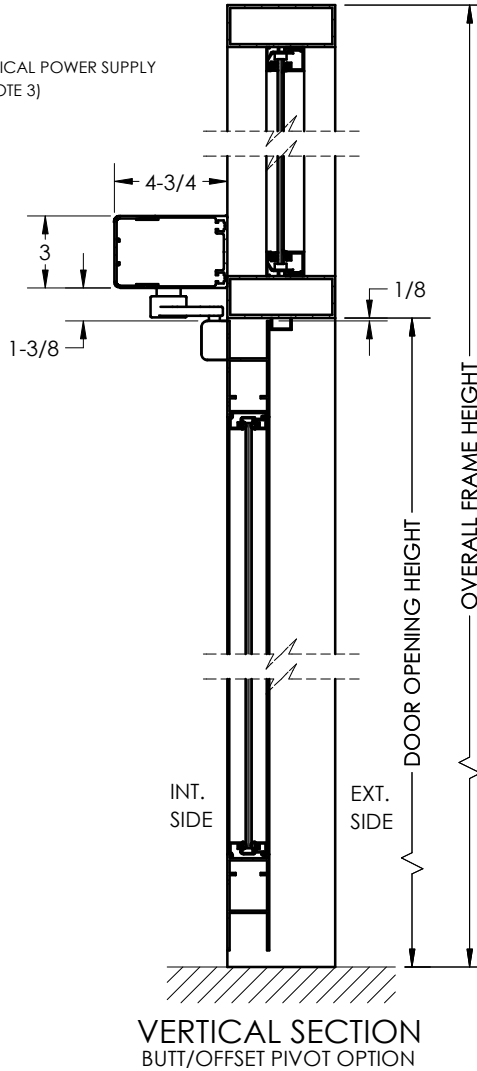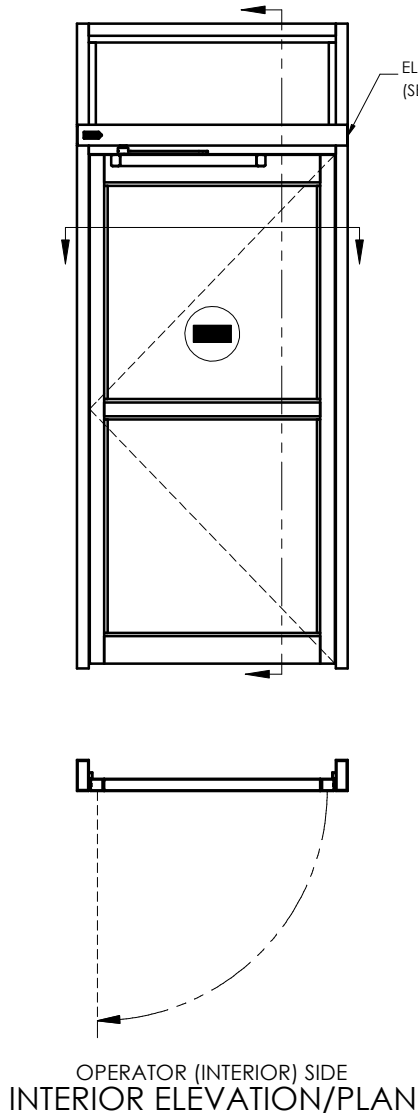

NOTES:





1. PUSH PLATES, SENSORS, GUIDE RAILS AND VARIOUS ELECTRONIC DEVICES FOR THE DOOR ACTIVATION AND CONTROL ARE OPTIONAL. CONSULT WITH YOUR CERTIFIED NABCO DISTRIBUTOR.
2. DOORS AND FRAMES ARE NOT INCLUDED UNLESS NOTED.
3. POWER TO HEADER WILL BE 115VAC, 5 AMP PER OPERATOR PROVIDED BY ELECTRICAL CONTRACTOR.
4. STANDARD HARDWARE SUPPLIED WILL ACCOMMODATE DOOR THICKNESS OF 1-3/4" TO 2-1/4".



NABCO Entrances Inc.
582 W18717 Gemini Drive Muskego, WI 53150
www.nabcoentrances.com 1-877-622-2694

JOB NAME: _____
LOCATION: _____
DISTRIBUTOR: _____
DOOR#: _____ DATE: _____
SHEET _____ OF _____

NABCO SWING
630-IN-NR-LH
INSWING
LEFT HAND

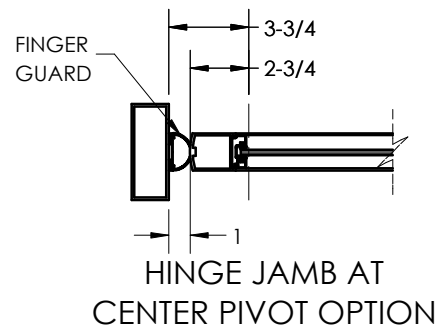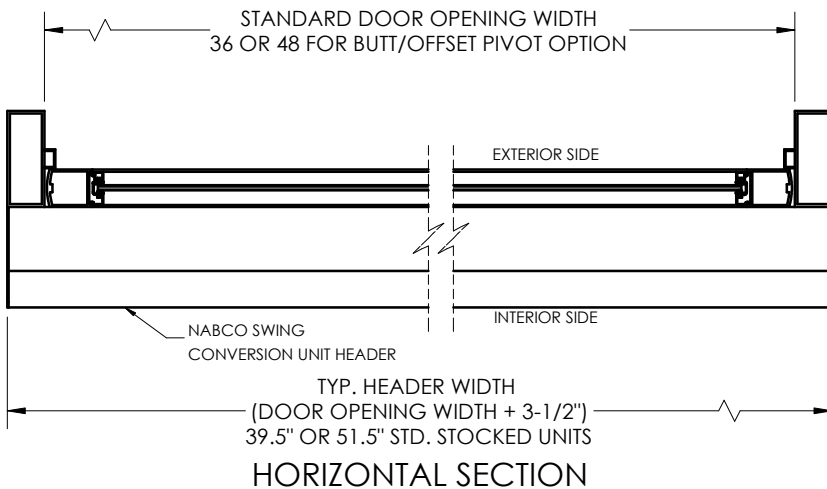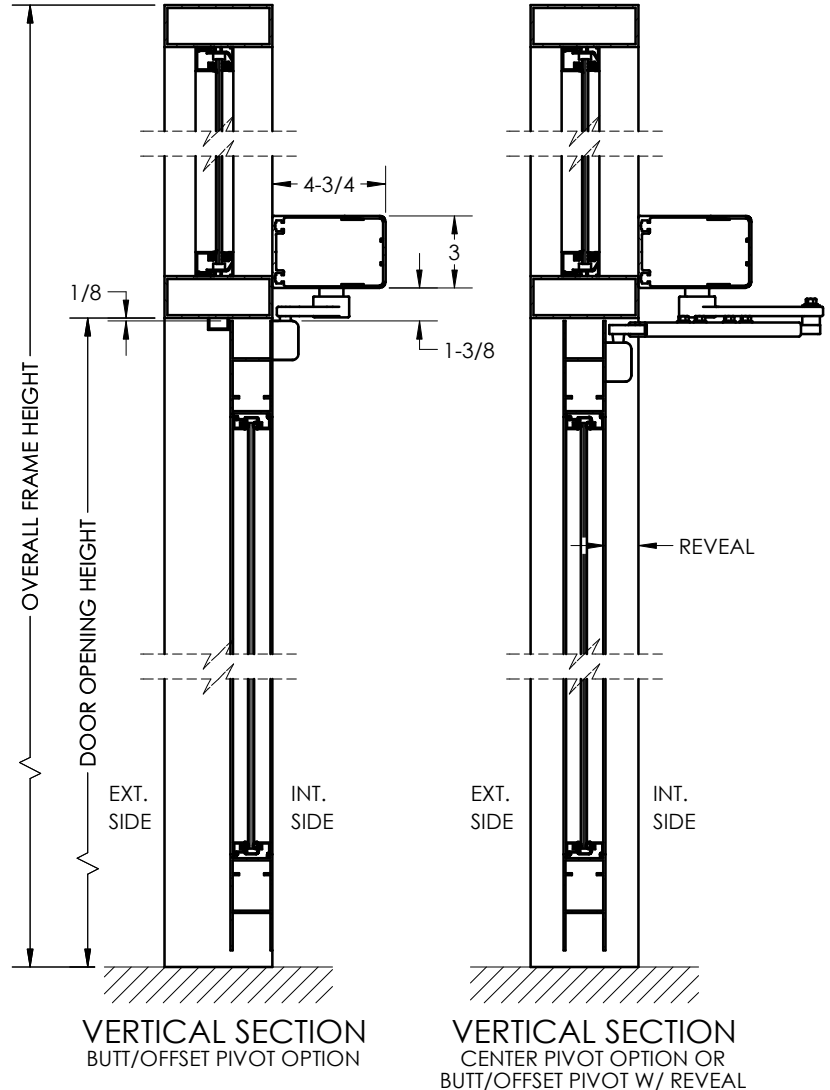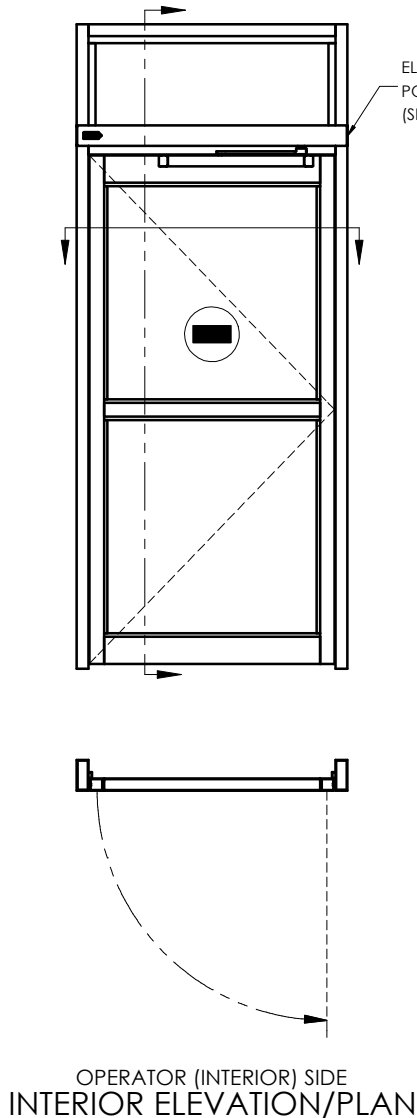

NOTES:

1. PUSH PLATES, SENSORS, GUIDE RAILS AND VARIOUS ELECTRONIC DEVICES FOR THE DOOR ACTIVATION AND CONTROL ARE OPTIONAL. CONSULT WITH YOUR CERTIFIED NABCO DISTRIBUTOR.
2. DOORS AND FRAMES ARE NOT INCLUDED UNLESS NOTED.
3. POWER TO HEADER WILL BE 115VAC, 5 AMP PER OPERATOR PROVIDED BY ELECTRICAL CONTRACTOR.
4. STANDARD HARDWARE SUPPLIED WILL ACCOMODATE DOOR THICKNESS OF 1-3/4" TO 2-1/4".