

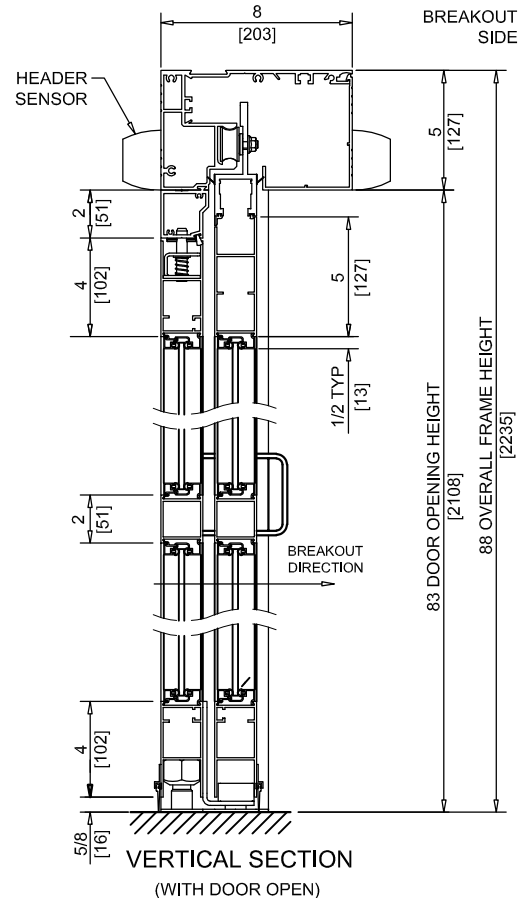

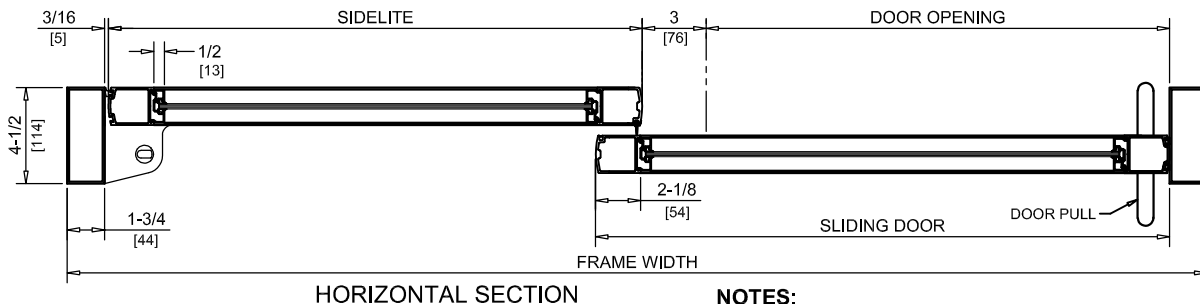


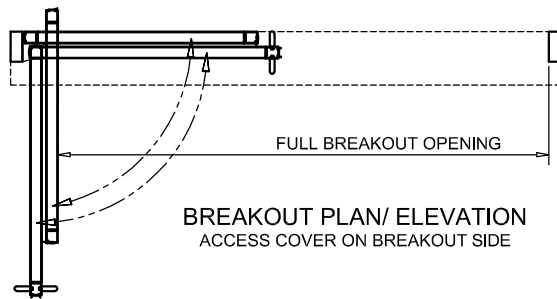

NABCO Entrances Inc.
S82 W18717 Gemini Drive Muskego, WI 53150
www.nabcoentrances.com 1-877-622-2694

JOB NAME: _____
LOCATION: _____
DISTRIBUTOR: _____
DOOR #: _____ DATE: _____
SHEET _____ OF _____

GT2400A-LH
SINGLE SLIDE
LEFT HAND
FULL OPEN
TRACKLESS

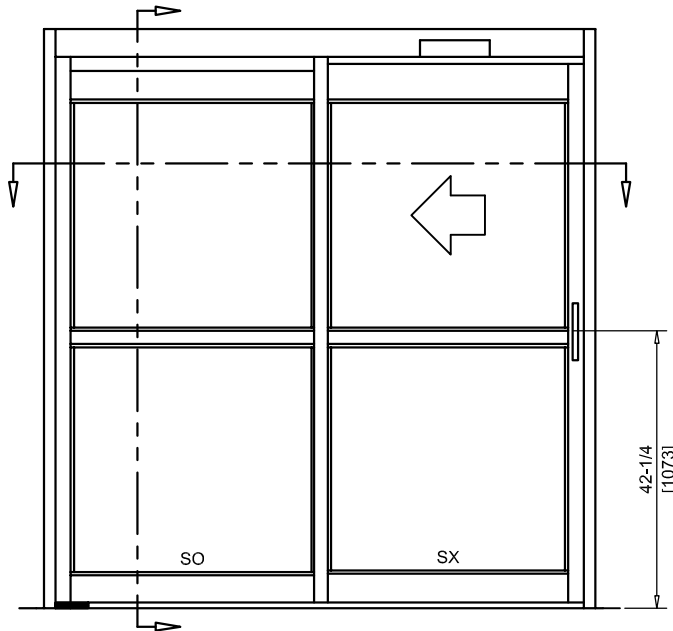

NOTES:

NO FLOOR TRACK TO INTERFERE WITH TRAFFIC.
BREAKOUT ONLY FROM FULL OPEN POSITION.
UNITS ARE HANDED FROM BREAKOUT SIDE.
ROUGH OPENING EQUALS FRAME WIDTH + 1/2" AND FRAME HEIGHT + 1/4".
SELF SUPPORTING, NOT OVERHEAD STRUCTURAL ANCHORING REQUIRED

STANDARD PACKAGE :

- 115VAC, 5 AMP CONTROLLER/OPERATOR
- LOW ENERGY CONTROL
- HEADER MOUNTED SENSORS
- ON/OFF/HOLD OPEN ROCKER SWITCH
- 204 CLEAR ANODIZED FINISH
- NARROW STILES (2-1/8")
- 1/2" TALL GLASS STOPS FOR 1/4" GLASS
- 2" MUNTIN, 42-1/4" FROM FINISHED FLOOR
- 4" BOTTOM RAILS
- VINYL WEATHERING

AVAILABLE OPTIONS

- PHOTOEYES
- TOUCHLESS SWITCHES
- SPECIAL FINISHES
- ALTERNATIVE GLASS SIZES UP TO 1" THICK
- 6-1/2" & 10" BOTTOM RAILS
- SMOKE RATING PACKAGE (COMPLIANT WITH UL1784 & NFPA 105)

FRAME WIDTH	DOOR OPENING	FULL BREAKOUT OPENING	DOOR PANEL	SIDELITE PANEL
84" [2134]	37.15" [944]	75.625" [1921]	42.375" [1076]	40" [1016]
96" [2438]	43.15" [1096]	87.625" [2226]	48.375" [1229]	46" [1168]
102" [2591]	46.15" [1172]	93.625" [2378]	51.375" [1305]	49" [1245]
108" [2743]	49.15" [1248]	99.625" [2530]	54.375" [1381]	52" [1321]